

TIRE CATALOGUE

Passenger Car, SUV and Light Truck



ARISUN

Made in Thailand / North America Version

Company Introduction



TOP 9
No. 9 of Top 75 Global Tire Manufacturers

SINCE 1958
Established in Year 1958

30,000 EMPLOYEES
Support from Over 30,000 Employees

200 MARKETS
Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tire company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tire manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tires with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tire products and the first-rate services. We are still endeavoring to become one of the most respected tire manufacturers globally and craft a better future with all partners and friends.

Most Advanced
Equipment

Best
Raw Material

Leanest
Management

Latest
Technology

Least
Energy Consumption

Most Suitable
Products

COMPANY MISSION



WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY

COMPANY VISION



TO BE A GLOBAL LEADING
TYRE MANUFACTURER



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil



Strategic Cooperation



ARISUN



OFFICIAL TIRE OF ARSENAL FOOTBALL CLUB

ALWAYS MOVING FORWARD

ARISUN

OE CUSTOMERS



KEY ACCOUNTS



KEY SUPPLIERS



CONTENTS

ARISUN

UHP 09

AGGRESSOR Z503

HP 11

AGGRESSOR ZP11

AGGRESSOR ZP01

4x4 15

ARESTA ZG02

H/T 17

ARESTA H/T ZG04

A/T 19

ARESTA A/T ZG06

R/T 21

ARESTA R/T ZG07

M/T 23

ARESTA M/T ZG08

COMMERCIAL LTR 25

Altrans Pro ZX05


ST 27

RADIAL ST-100





AGGRESSOR Z503

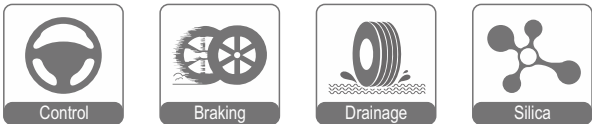

Benefits and Features

- Premium ultra high performance all-season tire with excellent high-speed handling
- Optimized tread block stiffness ensures enhanced performance and tread uniformity for improved handling performance and mileage.
- Asymmetric pattern design ensures improved dry handling and cornering performance
- Hybrid sipes design offer great all-season traction in wet, dry and snowy conditions

M+S

Rim Size	16 - 22
Series	30 - 55
Speed Rating	V - Y

AGGRESSOR Z503

Rim (inch)	Size	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	UTQG	TT/TL
16"	205/45ZR16 XL	87W	9.8	7.0J	8.1	23.2	1201	51	460 A A	TL
	225/50R16	92W	9.8	7.0J	9.2	24.9	1389	44	460 A A	TL
17"	205/40ZR17 XL	84W	9.8	7.5J	8.3	23.5	1102	51	460 A A	TL
	215/40ZR17 XL	87W	9.8	7.5J	8.6	23.8	1201	51	460 A A	TL
	245/40ZR17 XL	95W	9.8	8.5J	9.8	24.7	1521	51	460 A A	TL
	205/45ZR17 XL	88W	9.8	7.0J	8.1	24.3	1235	51	460 A A	TL
	215/45ZR17 XL	91W	9.8	7.0J	8.4	24.6	1356	51	460 A A	TL
	225/45ZR17 XL	94W	9.8	7.5J	8.9	25.0	1477	51	460 A A	TL
	235/45ZR17 XL	97W	9.8	8.0J	9.3	25.4	1609	51	460 A A	TL
	245/45ZR17 XL	99W	9.8	8.0J	9.6	25.7	1709	51	460 A A	TL
	255/45ZR17 XL	102W	9.8	8.5J	10.0	26.1	1874	51	460 A A	TL
	205/50R17 XL	93W	9.8	6.5J	8.4	25.1	1433	51	460 A A	TL
	215/50R17 XL	95W	9.8	7.0J	8.9	25.5	1521	51	460 A A	TL
	225/50R17 XL	98W	9.8	7.0J	9.2	25.9	1653	51	460 A A	TL
	235/50R17 XL	100W	9.8	7.5J	9.6	26.3	1764	51	460 A A	TL
	245/50R17	99W	9.8	7.5J	10.0	26.7	1709	44	460 A A	TL
	215/55R17 XL	98W	9.8	7.0J	8.9	26.3	1653	51	460 A A	TL
	225/55R17	97W	9.8	7.0J	9.2	26.8	1609	44	460 A A	TL
18"	235/55R17 XL	103W	9.8	7.5J	9.6	27.2	1929	51	460 A A	TL
	215/35ZR18 XL	84W	9.8	7.5J	8.6	23.9	1102	51	460 A A	TL
	225/35ZR18 XL	87W	9.8	8.0J	9.1	24.2	1201	51	460 A A	TL
	245/35ZR18 XL	92W	9.8	8.0J	9.1	25.2	1389	51	460 A A	TL
	255/35ZR18 XL	94W	9.8	8.5J	9.8	24.8	1477	51	460 A A	TL
	265/35ZR18 XL	97W	9.8	9.0J	10.2	25.0	1609	51	460 A A	TL
	215/40ZR18 XL	89W	9.8	9.5J	10.7	25.3	1279	51	460 A A	TL
	225/40ZR18 XL	92W	9.8	7.5J	8.6	24.8	1389	51	460 A A	TL
	235/40ZR18 XL	95W	9.8	8.0J	9.1	25.1	1521	51	460 A A	TL
	245/40ZR18 XL	97W	9.8	8.5J	9.5	25.4	1609	51	460 A A	TL
	255/40ZR18 XL	99W	9.8	8.5J	9.8	25.7	1709	51	460 A A	TL
	215/45ZR18 XL	93W	9.8	9.0J	10.2	26.0	1433	51	460 A A	TL
	225/45ZR18 XL	95W	9.8	7.0J	8.4	25.6	1521	51	460 A A	TL
	235/45ZR18 XL	98W	9.8	7.5J	8.9	25.9	1653	51	460 A A	TL
	245/45ZR18 XL	100W	9.8	8.0J	9.3	26.3	1764	51	460 A A	TL
	255/45ZR18 XL	103W	9.8	8.0J	9.6	26.7	1929	51	460 A A	TL
19"	225/50R18	95W	9.8	8.5J	10.0	27.0	1521	44	460 A A	TL
	235/50R18 XL	101W	9.8	7.0J	9.2	26.9	1819	51	460 A A	TL
	245/50R18 XL	104W	9.8	7.5J	9.6	27.3	1984	51	460 A A	TL
	225/35ZR19 XL	88W	9.8	7.5J	10.0	27.7	1235	51	460 A A	TL
	235/35ZR19 XL	91W	9.8	8.5J	9.5	25.5	1356	51	460 A A	TL
	245/35ZR19 XL	93W	9.8	8.5J	9.8	25.8	1433	51	460 A A	TL
	255/35ZR19 XL	96W	9.8	9.0J	10.2	26.0	1566	51	460 A A	TL
	225/40ZR19 XL	93W	9.8	8.0J	9.1	26.1	1433	51	460 A A	TL
	235/40ZR19 XL	96W	9.8	8.5J	9.5	26.4	1566	51	460 A A	TL
	245/40ZR19 XL	98W	9.8	8.5J	9.8	26.7	1653	51	460 A A	TL
	255/40ZR19 XL	100W	9.8	9.0J	10.2	27.0	1764	51	460 A A	TL
	275/40ZR19 XL	105W	9.8	9.5J	10.9	27.7	2039	51	460 A A	TL
	225/45ZR19 XL	96W	9.8	7.5J	8.9	27.0	1566	51	460 A A	TL
	235/45ZR19 XL	99W	9.8	8.0J	9.3	27.4	1709	51	460 A A	TL
	245/45ZR19 XL	102W	9.8	8.0J	9.6	27.7	1874	51	460 A A	TL
	255/45ZR19 XL	104W	9.8	8.5J	10.0	28.1	1984	51	460 A A	TL
20"	225/55R19	99V	9.8	7.0J	9.2	28.8	1709	44	460 A A	TL
	235/55R19	101V	9.8	7.5J	9.6	29.2	1819	44	460 A A	TL
	275/30R20 XL	97Y	9.8	9.5J	10.9	26.5	1609	51	460 A A	TL
	225/35ZR20 XL	90W	9.8	8.0J	9.1	26.2	1323	51	460 A A	TL
	245/35ZR20 XL	95W	9.8	8.5J	9.8	26.8	1521	51	460 A A	TL
	255/35ZR20 XL	97W	9.8	9.0J	10.2	27.0	1609	51	460 A A	TL
	265/35ZR22 XL	102W	9.8	9.0J	10.5	29.4	1874	51	460 A A	TL
	275/35ZR20 XL	102W	9.8	9.5J	10.9	27.6	1874	51	460 A A	TL
	245/40ZR20 XL	99W	9.8	8.5J	9.8	27.7	1709	51	460 A A	TL
	245/45ZR20 XL	103W	9.8	9.5J	10.7	30.4	1929	51	460 A A	TL
	255/45ZR20 XL	105W	9.8	8.0J	9.6	28.7	2039	51	460 A A	TL
	265/45ZR20 XL	108W	9.8	8.5J	10.0	29.1	2205	51	460 A A	TL
	225/55R20	99V	9.8	7.0J	9.2	28.8	1709	44	460 A A	TL
	235/55R20	101V	9.8	7.5J	9.6	29.2	1819	44	460 A A	TL
	275/30R20 XL	97Y	9.8	9.5J	10.9	26.5	1609	51	460 A A	TL
	225/35ZR20 XL	90W	9.8	8.0J	9.1	26.2	1323	51	460 A A	TL
22"	245/40ZR22 XL	106W	9.8	9.5J	10.7	29.3	2094	51	460 A A	TL



AGGRESSOR ZP11



Benefits and Features

- High-stiffness central rib ensures precise steering and better handling stability
- Four straight main grooves effectively resist hydroplaning and improves wet traction and safety
- High-density siping increases contact with the road for improved braking and handling in both wet and dry conditions

M+S

Rim Size	14 - 18
Series	40 - 70
Speed Rating	T - V

AGGRESSOR ZP11

Rim (inch)	Size	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	UTQG		TT/TL
14"	185/65R14	86H	9.4	5.5J	7.4	23.5	1168	44	500	A A	TL
	195/70R14	91T	9.8	6.0J	7.9	24.8	1356	44	540	A A	TL
	205/70R14	95T	9.8	6.0J	8.2	25.4	1521	51	540	A A	TL
15"	185/60R15	84H	9.8	5.5J	7.4	23.7	1102	44	540	A A	TL
	195/60R15	88H	9.8	6.0J	7.9	24.2	1235	44	540	A A	TL
	185/65R15	88H	9.8	5.5J	7.4	24.4	1235	44	540	A A	TL
	195/65R15	91H	9.8	6.0J	7.9	25.0	1356	44	540	A A	TL
	205/65R15	94H	9.8	6.0J	8.2	25.5	1477	44	540	A A	TL
	205/70R15	96H	9.8	6.0J	8.2	26.3	1565	44	540	A A	TL
	215/70R15	98H	9.8	6.5J	8.7	26.9	1653	44	540	A A	TL
	205/55R16	91V	9.8	6.5J	8.4	24.9	1356	44	540	A A	TL
16"	205/60R16	92H	9.8	6.0J	8.2	25.7	1389	44	540	A A	TL
	215/60R16	95H	9.8	6.5J	8.7	26.1	1521	44	540	A A	TL
	225/60R16	98H	9.8	6.5J	9.0	26.6	1653	44	540	A A	TL
	235/60R16	100H	10.3	7.0J	9.4	27.1	1764	44	600	A A	TL
	205/65R16	95H	9.8	6.0J	8.2	26.5	1521	44	540	A A	TL
	215/65R16	98H	9.8	6.5J	8.7	27.0	1653	44	540	A A	TL
	225/65R16	100H	9.8	6.5J	9.0	27.5	1764	44	540	A A	TL
	235/65R16	103H	10.3	7.0J	9.4	28.0	1929	44	600	A A	TL
	225/50R17	94V	10.3	7.0J	9.2	25.9	1477	44	600	A A	TL
	215/55R17	94V	10.3	7.0J	8.9	26.3	1477	44	600	A A	TL
17"	225/55R17	97H	10.3	7.0J	9.2	26.8	1609	44	600	A A	TL
	235/55R17	99H	10.3	7.5J	9.6	27.2	1709	44	600	A A	TL
	225/60R17	99H	10.3	6.5J	9.0	27.6	1709	44	600	A A	TL
	225/65R17	102T	10.3	6.5J	9.0	28.5	1874	44	600	A A	TL
	235/65R17	104H	10.3	7.0J	9.4	29.1	1984	44	600	A A	TL
	225/40R18	92V	10.3	8.0J	9.1	25.1	1389	51	600	A A	TL
	225/45R18	95V	10.3	7.5J	8.9	25.9	1521	51	600	A A	TL
	235/45R18	98V	10.3	8.0J	9.3	26.3	1653	51	600	A A	TL
	245/45R18	100V	10.3	8.0J	9.6	26.7	1764	51	600	A A	TL
	235/50R18	97V	10.3	7.5J	9.6	27.3	1609	44	600	A A	TL
18"	235/65R18	106T	10.3	7.0J	9.4	30.0	2094	44	600	A A	TL



AGGRESSOR ZP01



Benefits and Features

- High value touring all-season tire with smooth riding
- Variable pitches tread blocks for high stability and reduce noise
- Continuous center rib delivering better straight handling
- Four grooves with open shoulder provides perfect water evacuation

M+S

Rim Size	13 - 18
Series	40 - 80
Speed Rating	T - V

AGGRESSOR ZP01

Rim (inch)	Size	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	UTQG		TT/TL
13"	165/65R13	77T	9.4	5.0J	6.7	21.4	908	44	500	A A	TL
	175/70R13	82T	9.4	5.0B	7.0	22.7	1047	44	500	A A	TL
	185/70R13	86T	9.4	5.5J	7.4	23.2	1168	44	500	A A	TL
	155/80R13	79T	9.4	4.5B	6.2	22.8	963	44	500	A A	TL
	165/80R13	83T	9.4	4.5J	6.5	23.4	1074	44	500	A A	TL
14"	165/55R14	72V	9.4	5.0J	6.7	21.2	783	44	500	A A	TL
	185/60R14	82H	9.4	5.5J	7.4	22.8	1047	44	500	A A	TL
	195/60R14	86H	9.8	6.0J	7.9	23.2	1168	44	500	A A	TL
	175/65R14	82H	9.4	5.0J	7.0	23.0	1047	44	500	A A	TL
	185/65R14	86H	9.4	5.5J	7.4	23.5	1168	44	500	A A	TL
	175/70R14	84T	9.4	5.0J	7.0	23.7	1102	44	500	A A	TL
	185/70R14	88T	9.4	5.5J	7.4	24.3	1235	44	500	A A	TL
	195/70R14	91T	9.8	6.0J	7.9	24.8	1356	44	500	A A	TL
	205/70R14	95T	9.8	6.0J	8.2	25.4	1521	44	500	A A	TL
	165/50R15	72V	9.4	5.0J	6.7	21.5	783	44	500	A A	TL
15"	195/50R15	82V	9.8	6.0J	7.9	22.7	1047	44	500	A A	TL
	185/55R15	82V	9.4	6.0J	7.6	23.0	1047	44	500	A A	TL
	195/55R15	85V	9.8	6.0J	7.9	23.4	1135	44	500	A A	TL
	185/60R15	84H	9.4	5.5J	7.4	23.7	1102	44	500	A A	TL
	195/60R15	88H	9.8	6.0J	7.9	24.2	1235	44	500	A A	TL
	205/60R15	91H	9.8	6.0J	8.2	24.7	1356	44	500	A A	TL
	215/60R15	94H	9.8	6.5J	8.7	25.2	1477	44	500	A A	TL
	175/65R15	84H	9.4	5.0J	7.0	24.0	1102	44	500	A A	TL
	185/65R15	88H	9.4	5.5J	7.4	24.4	1235	44	500	A A	TL
	195/65R15	91H	9.8	6.0J	7.9	25.0	1356	44	500	A A	TL
	205/65R15	94H	9.8	6.0J	8.2	25.5	1477	44	500	A A	TL
	205/70R15	96H	9.8	6.0J	8.2	26.3	1565	44	500	A A	TL
	215/70R15	98H	9.8	6.5J	8.7	26.9	1653	44	500	A A	TL
	195/50R16	84V	9.8	6.0J	8.3	23.7	1102	44	500	A A	TL
	205/50R16	87V	9.8	6.5J	8.4	24.1	1201	44	500	A A	TL
16"	185/55R16	83V	9.4	6.0J	7.6	24.0	1074	44	500	A A	TL
	195/55R16	87V	9.8	6.0J	7.9	24.4	1201	44	500	A A	TL
	205/55R16	91V	9.8	6.5J	8.4	24.9	1356	44	500	A A	TL
	215/55R16	93V	9.8	7.0J	8.9	25.3	1433	44	500	A A	TL
	225/55R16	95V	9.8	7.0J	9.2	25.7	1521	44	500	A A	TL
	185/60R16	86H	9.4	5.5J	7.4	24.7	1168	44	500	A A	TL
	205/60R16	92H	9.8	6.0J	8.2	25.7	1389	44	500	A A	TL
	215/60R16	95H	9.8	6.5J	8.7	26.1	1521	44	500	A A	TL
	225/60R16	98H	9.8	6.5J	9.0	26.6	1653	44	500	A A	TL
	235/60R16	100H	9.8	7.0J	9.4	27.1	1764	44	500	A A	TL
	205/65R16	95H	9.8	6.0J	8.2	26.5	1521	44	500	A A	TL
	215/65R16	98H	9.8	6.5J	8.7	27.0	1653	44	500	A A	TL
	225/65R16	100H	9.8	6.5J	9.0	27.5	1764	44	500	A A	TL
	235/65R16	103H	9.8	7.0J	9.4	28.0	1929	44	500	A A	TL
	225/50R17	94V	9.8	7.0J	9.2	25.9	1477	44	500	A A	TL
17"	215/55R17	94V	9.8	7.0J	8.9	26.3	1477	44	500	A A	TL
	225/55R17	97H	9.8	7.0J	9.2	26.8	1609	44	500	A A	TL
	235/55R17	99H	9.8	7.5J	9.6	27.2	1709	44	500	A A	TL
	225/60R17	99H	9.8	6.5J	9.0	27.6	1709	44	500	A A	TL
	225/65R17	102T	9.8	6.5J	9.0	28.5	1874	44	500	A A	TL
	235/65R17	104H	9.8	7.0J	9.4	29.1	1984	44	500	A A	TL
	225/40R18 XL	92V	9.8	8.0J	9.1	25.1	1389	51	500	A A	TL
	225/45R18 XL	95V	9.8	7.5J	8.9	25.9	1521	51	500	A A	TL
	235/45R18 XL	98V	9.8	8.0J	9.3	26.3	1653	51	500	A A	TL
	245/45R18 XL	100V	9.8	8.0J	9.6	26.7	1764	51	500	A A	TL
18"	225/50R18	95V	9.8	7.0J	9.2	26.9	1521	44	500	A A	TL
	235/50R18	97V	9.8	7.5J	9.6	27.3	1609	44	500	A A	TL
	235/65R18	106T	9.8	7.0J	9.4	30.0	2094	44	500	A A	TL



ARESTA ZG02



Comfortable



Silent



Braking



Efficiency



Benefits and Features

- High-performance SUV tire with comfortable and quiet ride
- High stiffness center rib provides precise steering
- Four straight main grooves efficiently resist hydroplaning & aquaplaning performance up
- Zig-Zag snow sipes allows for improved all-season performance

M+S

Rim Size	15 - 24
Series	35 - 75
Speed Rating	S - V

ARESTA ZG02

Rim (inch)	Size	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	UTQG	TT/TL
15"	225/70R15	100T	10.3	6.5J	9.0	27.4	1764	44	500 A A	TL
	235/70R15	102T	10.3	7.0J	9.4	28.0	1874	44	500 A A	TL
	265/70R15	112T	10.3	8.0J	10.7	29.6	2469	44	500 A A	TL
	215/75R15	100T	10.3	6.0J	8.5	27.7	1764	44	500 A A	TL
	225/75R15	102T	10.3	6.0J	8.8	28.3	1874	44	500 A A	TL
	235/75R15	105H	10.3	6.5J	9.3	28.9	2039	44	500 A A	TL
	265/75R15	112T	10.3	7.5J	10.5	30.7	2469	44	500 A A	TL
16"	255/65R16	109H	10.3	7.5J	10.2	29.1	2270	44	500 A A	TL
	205/70R16	97T	10.3	6.0J	8.2	27.7	1609	44	500 A A	TL
	215/70R16	100T	10.3	6.5J	8.7	27.9	1764	44	500 A A	TL
	225/70R16	103H	10.3	6.5J	9.0	28.4	1929	44	500 A A	TL
	235/70R16	106H	10.3	7.0J	9.4	29.0	2095	44	500 A A	TL
	245/70R16	107T	10.3	7.0J	9.8	29.5	2149	44	500 A A	TL
	255/70R16	111H	10.3	7.5J	10.2	30.1	2403	44	500 A A	TL
	265/70R16	112T	10.3	8.0J	10.7	30.6	2469	44	500 A A	TL
	275/70R16	114T	10.3	8.0J	11.0	31.2	2601	44	500 A A	TL
	225/75R16	104H	10.3	6.0J	8.8	29.3	1984	44	500 A A	TL
	235/75R16	108T	10.3	6.5J	9.3	29.8	2205	44	500 A A	TL
	245/75R16	111T	10.3	7.0J	9.8	30.5	2403	44	500 A A	TL
	255/75R16	116T	10.3	7.5J	10.5	31.7	2756	44	500 A A	TL
	215/60R17	96H	10.3	6.5J	8.7	27.2	1565	44	500 A A	TL
	225/60R17	99T	10.3	6.5J	9.0	27.6	1709	44	500 A A	TL
17"	235/60R17	102T	10.3	7.0J	9.4	28.1	1874	44	500 A A	TL
	255/60R17 XL	110V	10.3	7.5J	10.2	29.1	2337	51	500 A A	TL
	265/60R17	108T	10.3	8.0J	10.7	29.5	2205	44	500 A A	TL
	275/60R17	110T	10.3	8.0J	11.0	30.0	2337	44	500 A A	TL
	215/65R17	99T	10.3	6.5J	8.7	28.0	1709	44	500 A A	TL
	225/65R17	102H	10.3	6.5J	9.0	28.5	1875	44	500 A A	TL
	235/65R17	104H	10.3	7.0J	9.4	29.1	1985	44	500 A A	TL
	245/65R17	107T	10.3	7.0J	9.8	29.5	2149	44	500 A A	TL
	255/65R17	110H	10.3	7.5J	10.2	30.1	2337	44	500 A A	TL
	265/65R17	112H	10.3	8.0J	10.7	30.6	2469	44	500 A A	TL
	275/65R17	115T	10.3	8.0J	11.0	31.1	2679	44	500 A A	TL
	285/65R17	116H	10.3	8.5J	11.5	31.6	2756	44	500 A A	TL
	235/70R17	109T	10.3	7.0J	9.4	30.0	2271	44	500 A A	TL
	245/70R17	110T	10.3	7.0J	9.8	30.6	2337	44	500 A A	TL
	255/70R17	112T	10.3	7.5J	10.2	31.1	2469	44	500 A A	TL
	265/70R17	115H	10.3	8.0J	10.7	31.7	2679	44	500 A A	TL
	255/75R17	115S	10.3	7.0J	10.0	32.0	2679	44	500 A A	TL
18"	225/50R18	95V	10.3	7.0J	9.2	26.9	1521	44	500 A A	TL
	235/50R18	97V	10.3	7.5J	9.6	27.3	1609	44	500 A A	TL
	215/55R18	95V	10.3	7.0J	8.9	27.3	1521	44	500 A A	TL
	225/55R18	98V	10.3	7.0J	9.2	27.8	1653	44	500 A A	TL
	235/55R18	100V	10.3	7.5J	9.6	28.1	1764	44	500 A A	TL
	245/55R18	103V	10.3	7.5J	10.0	28.6	1929	44	500 A A	TL
	255/55R18 XL	109V	10.3	8.0J	10.4	29.0	2271	51	500 A A	TL
	225/60R18	100H	10.3	6.5J	9.0	28.6	1764	44	500 A A	TL
	235/60R18	103V	10.3	7.0J	9.4	29.1	1929	44	500 A A	TL
	245/60R18	105T	10.3	7.0J	9.8	29.6	2039	44	500 A A	TL
	255/60R18 XL	112V	10.3	7.5J	10.2	30.0	2469	51	500 A A	TL
	265/60R18 XL	114V	10.3	8.0J	10.7	30.5	2601	51	500 A A	TL
	285/60R18	116H	10.3	8.5J	11.5	31.5	2756	44	500 A A	TL
	225/65R18	103H	10.3	6.5J	9.0	29.5	1929	44	500 A A	TL
	235/65R18	106H	10.3	7.0J	9.4	30.0	2094	44	500 A A	TL
	255/65R18	111T	10.3	7.5J	10.2	31.1	2403	44	500 A A	TL
	265/65R18	114T	10.3	8.0J	10.7	31.5	2601	44	500 A A	TL
	275/65R18	116T	10.3	8.0J	11.0	32.1	2756	44	500 A A	TL
19"	255/70R18	113T	10.3	7.5J	10.2	32.1	2535	44	500 A A	TL
	265/70R18	116H	10.3	8.0J	10.7	32.6	2756	44	500 A A	TL
	275/45R19 XL	108V	10.3	9.0J	10.7	28.8	2205	51	500 A A	TL
	235/50R19	99V	10.3	7.5J	9.6	28.3	1709	44	500 A A	TL
	255/50R19 XL	107V	10.3	8.0J	10.4	29.1	2149	51	500 A A	TL
	225/55R19	99V	10.3	7.0J	9.2	28.8	1709	44	500 A A	TL
	245/55R19	103V	10.3	7.5J	10.0	29.6	1929	44	500 A A	TL
	255/55R19 XL	111V	10.3	8.0J	10.4	30.0	2403	51	500 A A	TL
	255/60R19	109H	10.3	7.5J	10.2	31.1	2271	44	500 A A	TL
20"	255/40R20	101V	10.3	9.0J	10.2	28.0	1819	51	500 A A	TL
	275/40R20 XL	106V	10.3	9.5J	10.9	28.7	2094	51	500 A A	TL
	275/45R20 XL	110V	10.3	9.0J	10.7	29.8	2337	51	500 A A	TL
	245/50R20	102V	10.3	7.5J	10.0	29.7	1874	44	500 A A	TL
	255/55R20	107H	10.3	8.0J	10.4	31.0	2149	44	500 A A	TL
	265/50R20 XL	111V	10.3	8.5J	10.9	30.5	2403	51	500 A A	TL
	285/50R20 XL	116H	10.3	9.0J	11.7	31.3	2756	51	500 A A	TL
	235/55R20	102H	10.3	7.5J	9.6	30.2	1874	44	500 A A	TL
	255/55R20	107H	10.3	8.0J	10.4	31.0	2271	44	500 A A	TL
	275/55R20 XL	117V	10.3	8.5J	11.2	31.9	2833	51	500 A A	TL
22"	275/60R20	115H	10.3	8.0J	11.0	33.0	2679	44	500 A A	TL
	305/40R22 XL	114V	10.3	11.0J	12.3	31.6	2337	51	500 A A	TL
	285/45R22	114H	10.3	9.5J	11.2	32.1	2601	44	500 A A	TL
24"	305/45R22 XL	118V	10.3	10.0J	11.9	32.8	2910	51	500 A A	TL
	305/35R24 XL	112V	10.3	11.0J	12.3	32.0	2469	51	500 A A	TL



ARESTA H/T ZG04



Benefits and Features

- Premium all-season H/T tire with remarkable mileage
- All-season tread design with performance for highway driving and long tire life
- Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability
- Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability
- Wide circumferential grooves help to evacuate water quickly and efficiently

M+S


Rim Size	16 - 18
Series	70 - 85
Speed Rating	Q

ARESTA H/T ZG04

Rim (inch)	Size	LR/PR	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	TT/TL
16"	LT225/75R16	E/10PR	115/112Q	14.5	6.0J	8.8	29.3	2680/2470	80	TL
	LT245/75R16	E/10PR	120/116Q	14.5	7.0J	9.8	30.5	3042/2778	80	TL
	LT265/75R16	E/10PR	123/120Q	14.5	7.5J	10.5	31.7	3415/3085	80	TL
	LT215/85R16	E/10PR	115/112Q	14.5	6.0J	8.5	30.4	2680/2470	80	TL
	LT235/85R16	E/10PR	120/116Q	14.5	6.5J	9.3	31.7	3042/2778	80	TL
17"	LT245/70R17	E/10PR	119/116Q	14.5	7.0J	9.8	30.6	3000/2755	80	TL
	LT265/70R17	E/10PR	123/120Q	14.5	8.0J	10.7	31.7	3415/3085	80	TL
	LT245/75R17	E/10PR	121/118Q	14.5	7.0J	9.8	31.5	3195/2910	80	TL
	LT235/80R17	E/10PR	120/117Q	14.5	6.5J	9.3	31.8	3085/2835	80	TL
18"	LT265/70R18	E/10PR	124/121Q	14.5	8.0J	10.7	32.6	3525/3195	80	TL
	LT275/70R18	E/10PR	125/122Q	14.5	8.0J	11.0	33.2	3640/3305	80	TL



ARESTA A/T ZG06

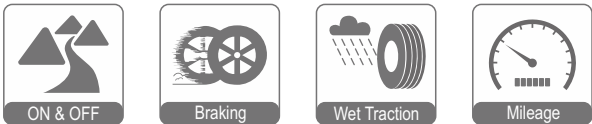

Benefits and Features

- Premium all-terrain tire with a strong focus on wet performance, durability and treadwear life
- New tread compound and pattern design guarantee a quiet and comfortable ride on the road and an excellent grip performance off the road
- Polygonal pattern block increases rigidity for excellent handling stability and off-road traction
- More lateral wave sipes and evenly distributed void area enhances on and off-road traction reducing irregular wear

M+S


Rim Size	15 - 22
Series	45 - 85
Speed Rating	Q - V

ARESTA A/T ZG06

Rim (inch)	Size	LR/PR	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	UTQG	TT/TL
15"	265/70R15	/	112T	13.6	8.0J	10.7	29.6	2469	44	500 A A	TL
	235/75R15	/	109S	12.0	6.5J	9.3	28.9	2271	51	500 A A	TL
	30x9.50R15LT	C/6PR	104S	15.7	7.5J	9.4	28.5	1985	50	/ / /	TL
	31x10.50R15LT	C/6PR	109S	15.7	8.5J	10.6	30.5	2270	50	/ / /	TL
	LT235/75R15	C/6PR	104/101S	14.5	6.5J	9.3	28.9	1985/1820	50	/ / /	TL
16"	215/70R16	/	100S	12.0	6.5J	8.7	27.9	1764	44	500 A A	TL
	225/70R16	/	103S	12.0	6.5J	9.0	28.4	1929	44	500 A A	TL
	235/70R16	/	106S	12.0	7.0J	9.4	29.0	2271	44	500 A A	TL
	245/70R16 XL	/	111S	13.6	7.0J	9.8	29.5	2403	51	500 A A	TL
	255/70R16	/	111T	13.6	7.5J	10.2	30.1	2403	44	500 A A	TL
	265/70R16	/	112S	13.6	8.0J	10.7	30.6	2469	44	500 A A	TL
	245/75R16	/	111S	13.6	7.0J	9.8	30.5	2403	44	500 A A	TL
	265/75R16	/	116S	13.6	7.5J	10.5	31.7	2756	44	500 A A	TL
	LT305/70R16	E/10PR	124/121Q	15.7	9.0J	12.2	32.8	3525/3195	65	/ / /	TL
	LT225/75R16	E/10PR	115/112S	14.5	6.0J	8.8	29.3	2680/2470	80	/ / /	TL
	LT245/75R16	E/10PR	120/116S	15.7	7.0J	9.8	30.5	3042/2778	80	/ / /	TL
	LT265/75R16	E/10PR	123/120S	15.7	7.5J	10.5	31.7	3415/3085	80	/ / /	TL
	LT285/75R16	E/10PR	126/123R	15.7	8.0J	11.3	32.8	3750/3415	80	/ / /	TL
	LT315/75R16	E/10PR	127/124Q	15.7	8.5J	12.3	34.6	3860/3525	65	/ / /	TL
	LT215/85R16	E/10PR	115/112S	14.5	6.0J	8.5	30.4	2680/2470	80	/ / /	TL
17"	LT235/85R16	E/10PR	120/116S	15.7	6.5J	9.3	31.7	3042/2778	80	/ / /	TL
	235/65R17	/	104S	12.0	7.0J	9.4	29.1	1984	44	500 A A	TL
	245/65R17	/	107S	13.6	7.0J	9.8	29.5	2149	44	500 A A	TL
	255/65R17	/	110T	13.6	7.5J	10.2	30.1	2337	44	500 A A	TL
	265/65R17	/	112S	13.6	8.0J	10.7	30.6	2469	44	500 A A	TL
	235/70R17 XL	/	109T	12.0	7.0J	9.4	30.0	2271	51	500 A A	TL
	245/70R17	/	110T	13.6	7.0J	9.8	30.6	2337	44	500 A A	TL
	255/70R17	/	112T	13.6	7.5J	10.2	31.1	2469	44	500 A A	TL
	265/70R17	/	115S	13.6	8.0J	10.7	31.7	2679	44	500 A A	TL
	285/70R17	/	117T	13.6	8.5J	11.5	32.8	2756	44	500 A A	TL
	235/75R17	/	109T	12.0	6.5J	9.3	30.9	2271	44	500 A A	TL
	245/75R17	/	112T	13.6	7.0J	9.8	31.5	2469	44	500 A A	TL
	255/75R17	/	115T	13.6	7.0J	10.0	32.0	2679	44	500 A A	TL
	33x12.50R17LT	E/10PR	120Q	15.7	10.0J	12.5	32.5	3085	65	/ / /	TL
	35x12.50R17LT	E/10PR	125Q	15.7	10.0J	12.5	34.5	3640	65	/ / /	TL
	LT245/70R17	E/10PR	119/116S	15.7	7.0J	9.8	30.6	3000/2755	80	/ / /	TL
	LT265/70R17	E/10PR	123/120S	15.7	8.0J	10.7	31.7	3415/3085	80	/ / /	TL
	LT285/70R17	E/10PR	126/123Q	15.7	8.5J	11.5	32.8	3750/3415	80	/ / /	TL
	LT315/70R17	E/10PR	126/123S	15.7	9.5J	12.7	34.4	3750/3415	65	/ / /	TL
	LT245/75R17	E/10PR	121/118S	15.7	7.0J	9.8	31.5	3195/2910	80	/ / /	TL
18"	LT285/75R17	E/10PR	128/125S	15.7	8.0J	11.3	33.9	3970/3640	80	/ / /	TL
	LT235/80R17	E/10PR	120/117R	15.7	6.5J	9.3	31.8	3085/2835	80	/ / /	TL
	33x12.50R18LT	E/10PR	118Q	15.7	10.0J	12.5	32.5	2910	65	/ / /	TL
	35x12.50R18LT	E/10PR	123R	15.7	10.0J	12.5	34.5	3415	65	/ / /	TL
	255/55R18 XL	/	109H	12.0	8.0J	10.4	29.0	2271	51	500 A A	TL
	265/60R18	/	110T	13.6	8.0J	10.7	30.5	2337	44	500 A A	TL
	285/60R18	/	116T	13.6	8.5J	11.5	31.5	2756	44	500 A A	TL
	265/65R18	/	114T	13.6	8.0J	10.7	31.5	2601	44	500 A A	TL
	275/65R18	/	116T	13.6	8.0J	11.0	32.1	2756	44	500 A A	TL
	255/70R18	/	113T	13.6	7.5J	10.2	32.1	2535	44	500 A A	TL
	265/70R18	/	116T	13.6	8.0J	10.7	32.6	2756	44	500 A A	TL
	LT265/65R18	E/10PR	122/119R	15.7	8.0J	10.7	31.5	3305/3000	80	/ / /	TL
	LT275/65R18	E/10PR	123/120S	15.7	8.0J	11.0	32.1	3415/3085	80	/ / /	TL
	LT285/65R18	E/10PR	125/122S	15.7	8.5J	11.5	32.6	3640/3305	80	/ / /	TL
	LT265/70R18	E/10PR	124/121S	15.7	8.0J	10.7	32.6	3525/3195	80	/ / /	TL
	LT275/70R18	E/10PR	125/122S	15.7	8.0J	11.0	33.2	3640/3305	80	/ / /	TL
	LT295/70R18	E/10PR	129/126S	15.7	8.5J	11.8	34.3	4080/3750	80	/ / /	TL
	LT285/75R18	E/10PR	129/126S	15.7	8.0J	11.3	34.8	4080/3750	80	/ / /	TL
20"	265/50R20 XL	/	111T	12.0	8.5J	10.9	30.5	2403	51	500 A A	TL
	285/50R20 XL	/	116V	12.0	9.0J	11.7	31.3	2756	51	500 A A	TL
	275/55R20	/	113S	12.0	8.5J	11.2	31.9	2535	44	500 A A	TL
	285/55R20	/	114T	12.0	9.0J	11.7	32.4	2601	44	500 A A	TL
	275/60R20	/	115T	13.6	8.0J	11.0	33.0	2679	44	500 A A	TL
	33x12.50R20LT	F/12PR	119Q	15.7	10.0J	12.5	32.5	3000	80	/ / /	TL
	35x12.50R20LT	F/12PR	125Q	15.7	10.0J	12.5	34.5	3640	80	/ / /	TL
	37x12.50R20LT	E/10PR	126Q	15.7	10.0J	12.5	36.5	3750	65	/ / /	TL
	LT275/55R20	E/10PR	120/117T	15.7	8.5J	11.2	31.9	3085/2835	80	/ / /	TL
	LT285/55R20	E/10PR	122/119S	15.7	9.0J	11.7	32.4	3305/3000	80	/ / /	TL
	LT305/55R20	E/10PR	121/118Q	15.7	9.5J	12.4	33.2	3195/2910	65	/ / /	TL
	LT265/60R20	E/10PR	121/118S	15.7	8.0J	10.7	32.5	3195/2910	80	/ / /	TL
	LT275/60R20	E/10PR	123/120T	15.7	8.0J	11.0	33.0	3415/3085	80	/ / /	TL
	LT285/60R20	E/10PR	125/122S	15.7	8.5J	11.5	33.5	3640/3305	80	/ / /	TL
	LT275/65R20	E/10PR	126/123S	15.7	8.0J	11.0	34.1	3750/3415	80	/ / /	TL
22"	LT295/65R20	E/10PR	129/126S	15.7	8.5J	11.8	35.1	4080/3750	80	/ / /	TL
	33x12.50R22LT	F/12PR	114Q	15.7	10.0J	12.5	32.5	2600	80	/ / /	TL
	35x12.50R22LT	F/12PR	121Q	15.7	10.0J	12.5	34.5	3195	80	/ / /	TL
	285/45R22	/	114H	12.0	9.5J	11.2	32.1	2601	51	500 A A	TL



ARESTA R/T ZG07

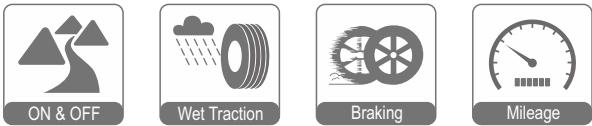

Benefits and Features

- Premium rugged-terrain tire with exceptional off-road performance coupled with on-road comfort and sophistication
- High volume pattern design ensures remarkable treadwear
- Staggered shoulder lugs enhance off-road traction with biting edges
- Aggressive sidewall design offer customization with a distinct look on each side of the tire

M+S

Rim Size	17 - 22
Series	55 - 80
Speed Rating	Q - T

ARESTA R/T ZG07

Rim (inch)	Size	LR/PR	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	UTQG	TT/TL
17"	33×12.50R17LT	E/10PR	120Q	15.7	10.0J	12.5	32.5	3085	65	/ / /	TL
	35×12.50R17LT	E/10PR	125Q	15.7	10.0J	12.5	34.5	3640	65	/ / /	TL
	37×12.50R17LT	E/10PR	128Q	15.7	10.J	12.5	36.5	3970	65	/ / /	TL
	LT265/70R17	E/10PR	123/120Q	15.7	8.0J	10.7	31.7	3415/3085	80	/ / /	TL
	LT285/70R17	E/10PR	126/123Q	15.7	8.5J	11.5	32.8	3750/3415	80	/ / /	TL
	LT255/80R17	E/10PR	123/120Q	15.7	7.0J	10.0	33.1	3415/3085	80	/ / /	TL
18"	33×12.50R18LT	E/10PR	118Q	15.7	10.0J	12.5	32.5	2910	65	/ / /	TL
	35×12.50R18LT	E/10PR	123Q	15.7	10.0J	12.5	34.5	3415	65	/ / /	TL
	LT275/65R18	E/10PR	123/120Q	15.7	8.0J	11.0	32.1	3415/3085	80	/ / /	TL
	LT275/70R18	E/10PR	125/122Q	15.7	8.0J	11.0	33.2	3640/3305	80	/ / /	TL
	LT295/70R18	E/10PR	129/126Q	15.7	8.5J	11.8	34.3	4080/3750	80	/ / /	TL
	LT285/75R18	E/10PR	129/126Q	15.7	8.0J	11.3	34.8	4080/3750	80	/ / /	TL
20"	275/55R20	/	117T	13.9	8.5J	11.2	31.9	2833	51	500 A B	TL
	275/60R20	/	116T	13.9	8.0J	11.0	33.0	2756	51	500 A B	TL
	33×12.50R20LT	E/10PR	114Q	15.7	10.0J	12.5	32.5	2600	65	/ / /	TL
	35×12.50R20LT	E/10PR	121Q	15.7	10.0J	12.5	34.5	3195	65	/ / /	TL
	37×12.50R20LT	F/12PR	128Q	15.7	10.0J	12.5	36.5	3970	80	/ / /	TL
	37×13.50R20LT	F/12PR	128Q	15.7	11.0J	13.6	36.5	3970	80	/ / /	TL
	LT285/55R20	E/10PR	122/119Q	15.7	9.0J	11.7	32.4	3305/3000	80	/ / /	TL
	LT305/55R20	F/12PR	125/122Q	15.7	9.5J	12.4	33.2	3640/3305	80	/ / /	TL
	LT295/60R20	E/10PR	126/123Q	15.7	8.5J	11.8	33.9	3750/3415	80	/ / /	TL
	LT275/65R20	E/10PR	126/123Q	15.7	8.0J	11.0	34.1	3750/3415	80	/ / /	TL
22"	LT295/65R20	E/10PR	129/126Q	15.7	8.5J	11.8	35.1	4080/3750	80	/ / /	TL
	33×12.50R22LT	E/10PR	109Q	15.7	10.0J	12.5	32.5	2270	65	/ / /	TL
	35×12.50R22LT	E/10PR	117Q	15.7	10.0J	12.5	34.5	2835	65	/ / /	TL
	37×12.50R22LT	F/12PR	127Q	15.7	10.0J	12.5	36.5	3860	80	/ / /	TL



ARESTA M/T ZG08



Benefits and Features

- Premium mud-terrain tire with best grip for off-road environments
- Robust tread design promise excellent traction on unpaved road
- Stone ejectors protect the tread grooves against stone drilling and puncturing
- Aggressive sidewall design enhances traction and side impact protection

M+S


Rim Size	15 - 22
Series	55 - 85
Speed Rating	Q

ARESTA M/T ZG08

Rim (inch)	Size	LR/PR	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	TT/TL
15"	30×9.50R15LT	C/6PR	104Q	18.9	7.5J	9.4	29.5	1985	50	TL
	31×10.50R15LT	C/6PR	109Q	18.9	8.5J	10.6	30.5	2270	50	TL
	32×11.50R15LT	C/6PR	113Q	18.9	9.0J	11.4	31.5	2535	50	TL
	33×12.50R15LT	C/6PR	108Q	18.9	10.0J	12.5	32.5	2205	35	TL
	35×12.50R15LT	C/6PR	113Q	18.9	10.0J	12.5	34.5	2535	35	TL
	LT235/75R15	C/6PR	104/101Q	18.9	6.5J	9.3	28.9	1985/1820	50	TL
16"	LT245/75R16	E/10PR	120/116Q	18.9	7.0J	9.8	30.5	3042/2778	80	TL
	LT265/75R16	E/10PR	123/120Q	18.9	7.5J	10.5	31.7	3415/3085	80	TL
	LT285/75R16	E/10PR	126/123Q	18.9	8.0J	11.3	32.8	3750/3415	80	TL
	LT315/75R16	E/10PR	127/124Q	18.9	8.5J	12.3	34.6	3860/3525	65	TL
	LT235/85R16	E/10PR	120/116Q	18.9	6.5J	9.3	31.7	3042/2778	80	TL
17"	33×12.50R17LT	D/8PR	114Q	18.9	10.0J	12.5	32.5	2600	50	TL
	35×12.50R17LT	E/10PR	125Q	18.9	10.0J	12.5	34.5	3640	65	TL
	LT265/70R17	E/10PR	123/120Q	18.9	8.0J	10.7	31.7	3415/3085	80	TL
	LT285/70R17	E/10PR	126/123Q	18.9	8.5J	11.5	32.8	3750/3415	80	TL
	LT255/75R17	C/6PR	108/111Q	18.9	7.0J	10.0	32.0	2405/2205	50	TL
	LT235/80R17	E/10PR	120/117Q	18.9	6.5J	9.3	31.8	3085/2835	80	TL
18"	33×12.50R18LT	E/10PR	118Q	18.9	10.0J	12.5	32.5	2910	65	TL
	35×12.50R18LT	E/10PR	123Q	18.9	10.0J	12.5	34.5	3415	65	TL
	LT275/65R18	E/10PR	123/120Q	18.9	8.0J	11.0	32.1	3415/3085	80	TL
	LT275/70R18	E/10PR	125/122Q	18.9	8.0J	11.0	33.2	3640/3305	80	TL
20"	33×12.50R20LT	F/12PR	119Q	18.9	10.0J	12.5	32.5	3000	80	TL
	35×12.50R20LT	F/12PR	125Q	18.9	10.0J	12.5	34.5	3640	80	TL
	37×13.50R20LT	F/12PR	128Q	18.9	11.0J	13.6	36.5	3970	80	TL
	LT305/55R20	F/12PR	124/121Q	18.9	9.5J	12.4	33.2	3525/3195	80	TL
	LT275/65R20	E/10PR	125/126Q	18.9	8.0J	11.0	34.1	3750/3415	80	TL
22"	33×12.50R22LT	F/12PR	114Q	18.9	10.0J	12.5	32.5	2600	80	TL
	35×12.50R22LT	F/12PR	121Q	18.9	10.0J	12.5	34.5	3195	80	TL
	37×13.50R22LT	F/12PR	128Q	18.9	11.0J	13.6	36.5	3970	80	TL



Altrans Pro ZX05

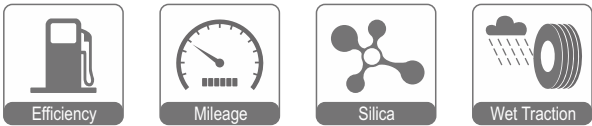

Benefits and Features

- Balanced pattern arrangement enhances traction for superior performance
- Advanced profile design ensures extended tire life
- Improved casing structure delivers exceptional durability

M+S

Rim Size	14 - 16
Series	65 - 75
Speed Rating	Q - T

Altrans Pro ZX05

Rim (inch)	Size	LR/PR	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	TT/TL
14"	185R14C	D/8PR	102/100R	11.3	5.5J	7.4	25.6	1875/1765	65	TL
	195R14C	D/8PR	106/104Q	11.3	5.5J	7.8	26.2	2095/1985	65	TL
	195R14C	E/10PR	110/108Q	11.3	5.5J	7.8	26.2	2335/2205	77	TL
	205R14C	D/8PR	109/107Q	12.0	6.0J	8.2	27.0	2270/2150	65	TL
	205R14C	E/10PR	113/111Q	12.0	6.0J	8.2	27.0	2535/2405	77	TL
	215R14C	D/8PR	112/110Q	12.0	6.0J	8.6	27.6	2470/2335	65	TL
15"	195R15C	D/8PR	106/104R	11.3	5.5J	7.8	27.2	2095/1985	65	TL
	215R15C	D/8PR	112/110Q	12.0	6.0J	8.6	28.5	2470/2335	65	TL
	205/70R15C	D/8PR	106/104R	11.3	6.0J	8.2	26.3	2095/1985	65	TL
	205/70R15C	E/10PR	108/106Q	11.3	6.0J	8.2	26.3	2205/2095	77	TL
	215/70R15C	D/8PR	109/107R	11.3	6.5J	8.7	26.9	2270/2150	65	TL
	225/75R15C	D/8PR	116/114Q	11.3	6.0J	8.8	28.3	2755/2600	69	TL
16"	215/65R16C	D/8PR	109/107R	11.3	6.5J	8.7	27.0	2270/2150	69	TL
	235/65R16C	F/12PR	121/119R	11.3	7.0J	9.4	28.0	3195/3000	83	TL
	215/70R16C	C/6PR	108/106T	11.3	6.5J	8.7	27.9	2205/2095	54	TL



RADIAL ST-100



Benefits and Features

- Double steel belts for enhanced strength helping puncture resistance and vehicle towing stability
- Long-life and low rolling resistance compound to offer long original treadwear and to promote fuel economy
- Full nylon cap available in all sizes for improved tire strength and durability

M+S

Rim Size	13 - 16
Series	75 - 85
Speed Rating	M

RADIAL ST-100

Rim (inch)	Size	LR/PR	Service Index	Tread Depth (32nd)	Standard Rim	Section Width (inch)	Overall Diameter (inch)	Max. Load (lbs)	Max. Air Pressure (psi)	TT/TL
13"	ST175/80R13	C/6PR	91/87M	9.4	5.0J	7.0	24.0	1360/1200	50	TL
	ST205/75R14	C/6PR	100/96M	9.8	5.5J	8.0	26.1	1760/1570	50	TL
14"	ST205/75R14	D/8PR	105/101M	9.8	5.5J	8.0	26.1	2040/1820	65	TL
	ST215/75R14	C/6PR	102/98M	9.8	6.0J	8.5	26.7	1870/1650	50	TL
	ST215/75R14	D/8PR	108/103M	9.8	6.0J	8.5	26.7	2200/1930	65	TL
	ST205/75R15	C/6PR	101/97M	9.8	5.5J	8.0	27.1	1820/1610	50	TL
15"	ST205/75R15	D/8PR	107/102M	9.8	5.5J	8.0	27.1	2150/1870	65	TL
	ST225/75R15	C/6PR	107/102M	10.3	6.0J	8.8	28.3	2150/1870	50	TL
	ST225/75R15	D/8PR	113/108M	10.3	6.0J	8.8	28.3	2540/2200	65	TL
	ST225/75R15	E/10PR	117/112M	10.3	6.0J	8.8	28.3	2830/2470	80	TL
	ST235/80R16	E/10PR	124/120M	10.3	6.5J	9.3	30.8	3520/3080	80	TL
16"	ST235/80R16	E/10PR	125/121M	10.3	6.5J	9.3	31.7	3640/3200	80	TL

ARISUN



www.arisuntires.com



ZHONGCE RUBBER GROUP CO., LTD.



www.zc-rubber.com



www.facebook.com/zcrubber



www.twitter.com/zc_rubber



www.linkedin.com/company/zcrubber