

TYRE CATALOGUE

Passenger Car, SUV and Light Truck



ARISUN

EU Version







TOP 9

No. 9 of Top 75 Global Tyre Manufacturers



SINCE 1958

Established in Year 1958


30000+

30,000 EMPLOYEES

Support from Over 30,000 Employees



200 MARKETS

Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.



Most Advanced
Equipment



Best
Raw Material



Leanest
Management



Latest
Technology



Least
Energy Consumption



Most Suitable
Products

COMPANY MISSION



WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY

COMPANY VISION



TO BE A GLOBAL LEADING
TYRE MANUFACTURER



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil



STRATEGIC COOPERATION



ARISUN



OFFICIAL TIRE OF ARSENAL FOOTBALL CLUB

ALWAYS MOVING FORWARD

Passenger Car, SUV and Light Truck Tyres

ARISUN

OE CUSTOMERS



KEY ACCOUNTS



KEY SUPPLIERS



ARISUN CONTENTS

Passenger Car, SUV and Light Truck Tyres

ULTRA HIGH PERFORMANCE (UHP) 09-12
SA-37 SA-57

PASSENGER 13-14
Z-107

SUV / LTR 15-22
SU318 SL369 SL399 SL366

COMMERCIAL LTR 23-24
H188

ALL SEASON 25-28
Z-401 SW613

WINTER 29-36
Z-507 SW608 SW612 Z-506

TYRE KNOWLEDGE 37-43

EU TYRE LABEL 44

SPORT SA-37



Benefits and Features

- New generation of asymmetric ultra high performance tyre for summer
- SILICA TECH compound helps to enhance wet grip providing shorter braking distance
- Strong center rib guarantees excellent handling on both wet and dry roads and on-center feel



M+S

Rim Size	15 - 24
Series	30 - 65
Speed Rating	H - Y

SPORT SA-37

Rim (inch)	Size	Service Index	Standard Rim	Control	Wet Traction	Asymmetric	Silica
15"	185/65R15	88H	5.5J	D	B	70/B	
	195/65R15	91V	6.0J	D	B	71/B	
16"	195/45R16 XL	84V	6.5J	D	B	72/B	
	205/50R16	87W	6.5J	D	B	71/B	
	225/50R16	92W	7.0J	D	B	71/B	
	205/55R16	91V	6.5J	D	B	71/B	
	205/55R16 XL	94W	6.5J	D	B	72/B	
	215/55R16	93V	7.0J	D	B	71/B	
	225/55R16 XL	99W	7.0J	D	B	72/B	
17"	205/40ZR17 XL	84Y	7.5J	D	B	72/B	
	215/40ZR17 XL	87Y	7.5J	D	B	72/B	
	245/40ZR17 XL	95Y	8.5J	D	B	72/B	
	205/45ZR17 XL	88Y	7.0J	D	B	72/B	
	215/45ZR17 XL	91Y	7.0J	D	B	72/B	
	225/45ZR17 XL	94Y	7.5J	D	B	72/B	
	235/45ZR17 XL	97Y	8.0J	D	B	72/B	
	245/45ZR17 XL	99W	8.0J	D	B	72/B	
	255/45ZR17 XL	102W	8.5J	D	B	73/B	
	205/50R17 XL	93W	6.5J	C	B	72/B	
	215/50R17 XL	95W	7.0J	C	B	72/B	
	225/50R17 XL	98W	7.0J	D	B	72/B	
	235/50R17	96V	7.5J	D	B	71/B	
	205/55R17 XL	95W	6.5J	D	B	72/B	
	215/55R17 XL	98W	7.0J	C	B	72/B	
	225/55R17 XL	101W	7.0J	C	B	72/B	
	235/55R17 XL	103W	7.5J	C	B	72/B	
18"	215/35ZR18 XL	84W	7.5J	D	B	72/B	
	225/35ZR18 XL	87Y	8.0J	D	B	72/B	
	245/35ZR18 XL	92W	8.5J	D	B	72/B	
	265/35ZR18 XL	97Y	9.5J	D	B	73/B	
	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
18"	235/50R18 XL	101V	7.5J	C	B	72/B	
	245/50R18	100W	7.5J	C	B	71/B	
	215/55R18 XL	99V	7.0J	C	B	72/B	
19"	265/30ZR19 XL	93Y	9.5J	D	B	73/B	
	275/30ZR19 XL	96Y	9.5J	D	B	73/B	
	235/35ZR19 XL	91Y	8.5J	D	B	72/B	
	245/35ZR19 XL	93Y	8.5J	D	B	72/B	
	255/35ZR19 XL	96Y	9.0J	D	B	73/B	
	275/35ZR19 XL	100W	9.5J	D	B	73/B	
	225/40ZR19 XL	93Y	8.0J	D	B	72/B	
	235/40ZR19	96Y	8.5J	D	B	71/B	
	245/40ZR19 XL	98Y	8.5J	D	B	72/B	
	255/40ZR19 XL	100Y	9.0J	C	B	73/B	
	225/45ZR19 XL	96Y	7.5J	D	B	72/B	
	245/45ZR19	98Y	8.0J	D	B	71/B	
	255/45ZR19 XL	104Y	8.5J	D	B	73/B	
	235/50R19	99W	7.5J	C	B	71/B	
20"	225/30ZR20 XL	85Y	8.0J	D	B	72/B	
	225/35ZR20 XL	90W	8.0J	D	B	72/B	
	245/35ZR20 XL	95Y	8.5J	D	B	72/B	
	255/35ZR20 XL	97W	9.0J	C	B	73/B	
	275/35ZR20 XL	102W	9.5J	D	B	73/B	
	245/40ZR20 XL	99W	8.5J	D	B	72/B	
	245/45ZR20	99W	8.0J	D	B	71/B	
	255/45ZR20 XL	105W	8.5J	C	B	73/B	
	265/45ZR20 XL	108W	9.0J	C	B	73/B	
	245/50R20	102W	7.5J	C	B	71/B	
	265/50R20 XL	111W	8.5J	C	B	73/B	
	275/50R20 XL	113W	8.5J	B	B	73/B	
	235/55R20 XL	105W	7.5J	C	B	72/B	
	255/55R20 XL	110W	8.0J	C	B	73/B	
21"	295/35ZR21 XL	107Y	10.5J	C	B	75/B	
	265/40ZR21 XL	105W	9.5J	C	B	73/B	
	315/40ZR21	111Y	11.0J	C	B	74/B	
	265/45ZR21	104W	9.0J	C	B	72/B	
	275/45ZR21 XL	110Y	9.0J	C	B	73/B	
22"	235/30ZR22 XL	90Y	8.5J	D	B	72/B	
	245/30ZR22 XL	92Y	8.5J	D	B	72/B	
	285/45R22 XL	114V	9.5J	D	B	75/B	
24"	255/30ZR24 XL	97Y	9.0J	D	B	73/B	

ZUPERACE SA-57



Benefits and Features

- New generation of directional Ultra High Performance tyre
- Circumferential V-grooves ensure outstanding water drainage
- Strong center ribs provides remarkable handling while steering
- Improved SILICA compounding enhance the wet and dry grip



M+S

Rim Size	15 - 24
Series	35 - 60
Speed Rating	V - W

ZUPERACE SA-57

Rim (inch)	Size	Service Index	Standard Rim					Rim (inch)	Size	Service Index	Standard Rim				
15"	195/50R15	82V	6.0J	D	B	71/B		18"	225/45ZR18 XL	95W	7.5J	D	B	72/B	
	195/55R15	85V	6.0J	D	B	71/B			235/45ZR18 XL	98W	8.0J	D	B	72/B	
16"	205/50R16	87W	6.5J	D	B	71/B		19"	245/45ZR18 XL	100W	8.0J	D	B	72/B	
	225/50R16	92W	7.0J	D	B	71/B			225/50R18	95W	7.0J	D	B	71/B	
	205/55R16 XL	94W	6.5J	D	B	72/B			235/50R18 XL	101W	7.5J	D	B	72/B	
	215/55R16 XL	97W	7.0J	D	B	72/B			255/55R18 XL	109V	8.0J	D	B	73/B	
17"	225/55R16 XL	99W	7.0J	D	B	72/B		20"	265/60R18	110V	8.0J	C	B	72/B	
	205/40ZR17 XL	84W	7.5J	D	B	72/B			215/35ZR19 XL	85W	7.5J	D	B	72/B	
	215/40ZR17 XL	87W	7.5J	D	B	72/B			225/35ZR19 XL	88W	8.0J	D	B	72/B	
	245/40ZR17 XL	95W	8.5J	D	B	72/B			245/45ZR19 XL	102W	8.0J	D	B	72/B	
	205/45ZR17 XL	88W	7.0J	D	B	72/B		22"	255/45ZR19 XL	104W	8.5J	D	B	73/B	
	215/45ZR17 XL	91W	7.0J	D	B	72/B			275/40ZR20 XL	106W	9.5J	C	B	73/B	
	225/45ZR17 XL	94W	7.5J	D	B	72/B			255/45R20 XL	105V	8.5J	C	B	73/B	
	235/45ZR17 XL	97W	8.0J	D	B	72/B			275/45R20 XL	110V	9.0J	C	B	73/B	
	205/50R17 XL	93W	6.5J	D	B	72/B			265/50R20 XL	111V	8.5J	C	B	73/B	
	215/50R17 XL	95W	7.0J	D	B	72/B			285/50R20	112V	9.0J	C	B	74/B	
18"	225/50R17 XL	98W	7.0J	D	B	72/B			275/55R20 XL	117V	8.5J	C	B	73/B	
	215/55R17 XL	98W	7.0J	D	B	72/B			275/60R20 XL	119V	8.0J	C	B	73/B	
	225/55R17 XL	101W	7.0J	D	B	72/B		24"	265/35R22 XL	102V	9.5J	D	B	73/B	
	235/55R17 XL	103W	7.5J	D	B	72/B			285/35R22 XL	106V	10.0J	D	B	75/B	
18"	265/35ZR18 XL	97W	9.5J	D	B	73/B			265/40R22 XL	106V	9.5J	C	B	73/B	
	225/40ZR18 XL	92W	8.0J	D	B	72/B			305/40R22 XL	114V	11.0J	C	B	75/B	
	235/40ZR18 XL	95W	8.5J	D	B	72/B			305/45R22 XL	118V	10.0J	C	B	75/B	
	245/40ZR18 XL	97W	8.5J	D	B	72/B			295/35R24 XL	110V	10.5J	C	B	75/B	




ZuperEco Z-107



Benefits and Features

- Premium touring tyre for summer
- Improved tyre structure guarantees a comfort and smooth ride
- Optimized compound offers better wet grip and lower rolling resistance
- Remarkable handing on dry and wet road surface

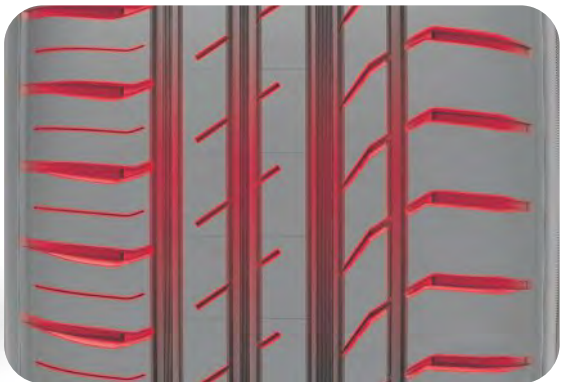

Rim Size	13 - 20
Series	30 - 80
Speed Rating	T - W

ZuperEco Z-107

Rim (inch)	Size	Service Index	Standard Rim			
13"	155/65R13	73T	4.5B	D	B	70/B
	155/70R13	75T	4.5J	D	B	70/B
	165/70R13	79T	5.0J	D	B	70/B
	175/70R13	82T	5.0J	D	B	70/B
	185/70R13	86T	5.5J	D	B	70/B
	155/80R13	79T	4.5J	D	B	70/B
	165/80R13	83T	4.5B	D	B	70/B
14"	185/55R14	80V	6.0J	D	B	70/B
	165/60R14	75H	5.0J	D	B	70/B
	175/60R14	79H	5.0J	D	B	70/B
	185/60R14	82H	5.5J	D	B	70/B
	155/65R14	75T	4.5J	D	B	70/B
	165/65R14	79T	5.0J	D	B	70/B
	175/65R14	82H/T	5.0J	D	B	70/B
	185/65R14	86H	5.5J	D	B	70/B
	195/65R14	89H	6.0J	D	B	71/B
	165/70R14	81T	5.0J	D	B	70/B
	175/70R14	84T	5.0J	D	B	70/B
	185/70R14	88T	5.5J	C	B	70/B
	195/70R14	91T	6.0J	C	B	71/B
	205/70R14	95T	6.0J	C	B	71/B
15"	195/45R15	78V	6.5J	D	B	71/B
	195/50R15	82V	6.0J	D	B	71/B
	175/55R15	77H	5.5J	D	B	70/B
	185/55R15	82V/H	6.0J	D	B	70/B
	195/55R15	85V/H	6.0J	D	B	71/B
	155/60R15	74H	4.5B	D	B	70/B
	175/60R15	81H	5.0J	D	B	70/B
	185/60R15	84H	5.5J	D	B	70/B
	195/60R15	88V/H	6.0J	D	B	71/B
	205/60R15	91H	6.0J	C	B	71/B
	165/65R15	81H	5.0J	D	B	70/B
	175/65R15	84H	5.0J	D	B	70/B
	185/65R15	88H/T	5.5J	D	B	70/B
	195/65R15	91V/H/T	6.0J	C	B	71/B
	215/65R15	96H	6.5J	C	B	71/B
	205/65R15	94V	6.0J	C	B	71/B
	205/70R15	96H	6.0J	C	B	71/B
	215/70R15	98H	6.5J	C	B	71/B
16"	215/40R16 XL	86W	7.5J	D	B	72/B
	195/45R16 XL	84V	6.5J	D	B	72/B
	205/45R16 XL	87W	7.0J	D	B	72/B
	215/45R16 XL	90W	7.0J	D	B	72/B
	185/50R16	81V	6.0J	D	B	70/B
	195/50R16	84V	6.0J	D	B	71/B
	205/50R16	87V	6.5J	D	B	71/B
	185/55R16	83V	6.0J	C	B	70/B
	195/55R16	87V/H	6.0J	D	B	71/B
	205/55R16	91W/V/H	6.5J	D	B	71/B
	205/55R16 XL	94W	6.5J	C	B	72/B
	215/55R16	93V	7.0J	C	B	71/B
	215/55R16 XL	97W	7.0J	C	B	72/B
	225/55R16	95V	7.0J	C	B	71/B
17"	225/55R16 XL	99W	7.0J	C	B	72/B
	195/60R16	89V	6.0J	C	B	71/B
	205/60R16	92V/H	6.0J	C	B	71/B
	215/60R16 XL	99V	6.5J	C	B	72/B
	225/60R16	98H	6.5J	C	B	71/B
18"	225/35ZR18 XL	97W	9.5J	C	B	73/B
	205/40R18 XL	86W	7.5J	D	B	71/B
	215/40R18 XL	89W	7.5J	D	B	72/B
	225/40R18 XL	92W	8.0J	C	B	72/B
	235/40R18 XL	95W	8.5J	C	B	72/B
	245/40R18 XL	97W	8.5J	C	B	72/B
	215/45R18 XL	93W	7.0J	D	B	72/B
	225/45R18 XL	95W	7.5J	C	B	72/B
	235/45R18 XL	98W	8.0J	C	B	72/B
	245/45R18 XL	100W	8.0J	C	B	72/B
	235/50R18	97V	7.5J	D	B	71/B
	215/55R18 XL	99V	7.0J	C	B	72/B
	225/55R18	98V	7.0J	C	B	71/B
	235/55R18	100H/V	7.5J	C	B	71/B
19"	225/60R18 XL	107V	7.0J	D	B	71/B
	255/60R18 XL	112V	7.5J	C	B	73/B
	225/35ZR19 XL	88W	8.0J	D	B	72/B
	235/35ZR19 XL	91W	8.5J	D	B	72/B
	245/35ZR19 XL	93W	8.5J	D	B	72/B
	265/35ZR19 XL	98W	9.5J	D	B	73/B
	225/40R19 XL	93W	8.0J	C	B	72/B
	235/40R19 XL	96W	8.5J	C	B	72/B
	245/40R19 XL	98W	8.5J	C	B	72/B
	275/40R19 XL	105W	9.5J	C	B	73/B
	225/45R19 XL	96W	7.5J	C	B	72/B
	235/45R19 XL	99W	8.0J	C	B	72/B
	245/45R19 XL	102W	8.0J	C	B	72/B
	235/50R19	99W	7.5J	C	B	71/B
20"	205/55R19 XL	97V	6.5J	C	B	72/B
	235/55R19 XL	105V	7.5J	C	B	72/B
	245/30R20 XL	90W	8.5J	D	B	72/B
	245/40R20 XL	99W	8.5J	C	B	71/B
Note: Section Width less than 195 with 3 grooves						

SU318 H/T



Benefits and Features

- Ideal H/T tyre integrated outstanding on-road comfort and wet traction safety as a whole
- Four longitude grooves combined with wind sipes ensure excellent water evacuation and wet traction performance
- SILICA TECH adopted for better wet grip as well as low rolling resistance
- Re-constructed steel bead wire improves driving comfort effectively



M+S

Rim Size	15 - 20
Series	40 - 75
Speed Rating	T - V

SU318 H/T

<i>Rim (inch)</i>	<i>Size</i>	<i>Service Index</i>	<i>Standard Rim</i>				
15"	225/70R15	100T	6.5J	D	C	71/B	
	235/70R15	103T	7.0J	D	C	71/B	
	265/70R15	112T	8.0J	C	C	72/B	
	215/75R15	100T	6.0J	D	C	71/B	
	225/75R15	102H	6.0J	D	C	71/B	
	235/75R15	105H	6.5J	D	C	71/B	
	265/75R15	112T	7.5J	C	C	72/B	
16"	255/65R16	109H	7.5J	C	C	72/B	
	215/70R16	100H	6.5J	D	C	71/B	
	225/70R16	103H	6.5J	D	C	71/B	
	235/70R16	106H	7.0J	D	C	71/B	
	245/70R16 XL	111H	7.0J	D	C	72/B	
	255/70R16	111T	7.5J	C	C	72/B	
	265/70R16	112H	8.0J	C	C	72/B	
	275/70R16	114T	8.0J	C	C	72/B	
	225/75R16	104H	6.0J	D	C	71/B	
	235/75R16	108T	6.5J	D	C	71/B	
245/75R16	111T	7.0J	D	C	71/B		
265/75R16	116T	7.5J	C	C	72/B		
17"	215/60R17	96H	6.5J	D	C	71/B	
	225/60R17 XL	103V	6.5J	D	C	72/B	
	235/60R17	102T	7.0J	D	C	71/B	
	255/60R17 XL	110V	7.5J	C	C	73/B	
	265/60R17	108H	8.0J	C	C	72/B	
	275/60R17	110T	8.0J	C	C	72/B	
17"	225/65R17 XL	106V	6.5J	D	C	72/B	
	235/65R17 XL	108V	7.0J	D	C	72/B	
	245/65R17	107H	7.0J	D	C	71/B	
	255/65R17	110H	7.5J	C	C	72/B	
	265/65R17	112T	8.0J	C	C	72/B	
	275/65R17	115T	8.0J	C	C	72/B	
18"	235/50R18	97V	7.5J	D	C	71/B	
	225/55R18	98V	7.0J	D	C	71/B	
	235/55R18	100V	7.5J	D	C	71/B	
	255/55R18 XL	109V	8.0J	C	C	73/B	
	225/60R18	100V	6.5J	D	C	71/B	
	235/60R18	103V	7.0J	D	C	71/B	
19"	245/60R18	105T	7.0J	D	C	71/B	
	255/60R18 XL	112V	7.5J	C	C	73/B	
	265/60R18 XL	114V	8.0J	C	C	73/B	
	285/60R18	116H	8.5J	C	C	74/B	
	275/45R19 XL	108V	9.0J	C	C	73/B	
	255/50R19 XL	107V	8.0J	C	C	73/B	
20"	255/65R19 XL	114V	7.5J	C	C	73/B	
	275/40R20 XL	106V	9.5J	D	C	73/B	
	275/55R20 XL	117V	8.5J	C	C	73/B	
	255/60R20	113V	7.5J	C	C	72/B	



SL369 A/T



Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions



M+S

Rim Size	15 - 20
Series	45 - 80
Speed Rating	S - V

SL369 A/T

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons
15"	205/65R15	94H	6.0J	D D 71/B	17"	225/65R17	102T	6.5J	D D 71/B
	205/70R15	96H	6.0J	D D 71/B		235/65R17	104S	7.0J	D D 71/B
	225/70R15	100T	6.5J	D D 71/B		245/65R17	107S	7.0J	D D 71/B
	235/70R15	103S	7.0J	D D 71/B		255/65R17	110T	7.5J	D D 72/B
	265/70R15	112T	8.0J	D D 72/B		265/65R17	112S	8.0J	D D 72/B
	P215/75R15	100S	6.0J	D D 71/B		225/70R17 XL	108S	6.5J	D D 72/B
	235/75R15 XL	109S	6.5J	D D 72/B		245/70R17	110T	7.0J	D D 71/B
16"	205/60R16	92H	6.0J	D D 71/B	18"	255/70R17	112T	7.5J	D D 72/B
	235/60R16	100T	7.0J	D D 71/B		265/70R17	115T	8.0J	D D 72/B
	215/70R16	100S	6.5J	D D 71/B		285/70R17	117T	8.5J	D D 74/B
	225/70R16	103S	6.5J	D D 71/B		235/75R17	109T	6.5J	D D 71/B
	235/70R16	106S	7.0J	D D 71/B		245/75R17	112T	7.0J	D D 71/B
	245/70R16 XL	111S	7.0J	D D 72/B		255/75R17	115T	7.0J	D D 72/B
	255/70R16	111T	7.5J	D D 72/B	20"	265/60R18	110T	8.0J	D D 72/B
	265/70R16	112S	8.0J	D D 72/B		265/65R18	114T	8.0J	D D 72/B
	275/70R16	114S	8.0J	D D 72/B		275/65R18	116T	8.0J	D D 72/B
	225/75R16 XL	108S	6.0J	D D 72/B		275/45R20 XL	110H	9.0J	D D 73/B
	235/75R16 XL	112S	6.5J	D D 72/B		265/50R20 XL	111T	8.5J	D D 73/B
	245/75R16	111S	7.0J	D D 71/B		285/50R20 XL	116V	9.0J	D D 75/B
	265/75R16	116S	7.5J	D D 72/B		275/55R20	113S	8.5J	D D 72/B
	205/80R16 XL	104S	5.5J	D D 72/B		275/60R20	115T	8.0J	D D 72/B
	215/80R16 XL	107S	6.0J	D D 72/B					

Outline White Letters (OWL)




TERRA LEGEND SL399



Benefits and Features

- Wider tread design and new compound help longer tread life On & Off road
- Side-Biter lugs in the sidewall improve traction in mud and rough road
- Aggressive sidewall design provide increased traction, especially in aired-down driving situations

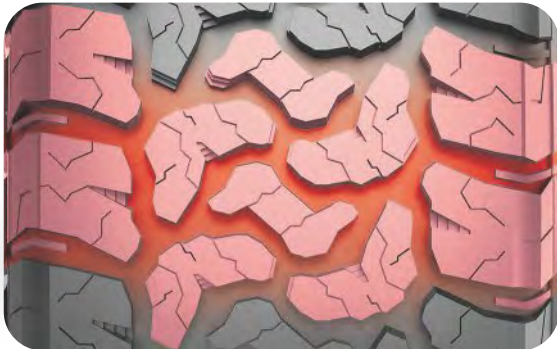

M+S

Rim Size	15 - 20
Series	50 - 75
Speed Rating	Q - V

TERRA LEGEND SL399

Rim (inch)	Size	Service Index	Standard Rim					Rim (inch)	Size	LR/PR	Service Index	Standard Rim				
15"	235/75R15 XL *	109S	6.5J	/	/	/	/	15"	31×10.50R15LT	C/6PR	109S	8.5J	/	POR	/	
16"	215/70R16 *	100S	6.5J	/	/	/	/		LT235/75R15	C/6PR	104/101R	6.5J	/	POR	/	
	235/70R16 *	106S	7.0J	/	/	/	/		LT235/75R15	C/6PR	104/101Q	6.5J	/	POR	/	
	255/70R16 *	111T	7.5J	/	/	/	/	16"	LT245/70R16	E/10PR	118/115Q	7.0J	/	POR	/	
	265/70R16 *	112S	8.0J	/	/	/	/		LT245/75R16	E/10PR	120/116Q	7.0J	/	POR	/	
	275/70R16 *	114S	8.0J	/	/	/	/	17"	LT265/65R17	E/10PR	120/117Q	8.0J	/	POR	/	
17"	245/65R17 *	107S	7.0J	/	/	/	/		LT285/65R17	E/10PR	121/118Q	8.5J	/	POR	/	
	265/65R17 *	112S	8.0J	/	/	/	/		LT245/70R17	E/10PR	119/116Q	7.0J	/	POR	/	
	265/70R17 *	115T	8.0J	/	/	/	/	20"	LT285/50R20	E/10PR	119/116Q	9.0J	/	POR	/	
18"	235/60R18 *	103T	7.0J	/	/	/	/		POR: Professional Off-Road							
	255/60R18 XL *	112V	7.5J	/	/	/	/									
	265/60R18 *	110T	8.0J	/	/	/	/									
	285/60R18 *	116T	8.5J	/	/	/	/									
	235/65R18 *	106T	7.0J	/	/	/	/									
	265/65R18 *	114T	8.0J	/	/	/	/									
19"	245/55R19 *	103T	7.5J	/	/	/	/									
20"	265/50R20 XL *	111T	8.5J	/	/	/	/									

*: Available Soon

POR: Professional Off-Road




MUD LEGEND SL366



Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand

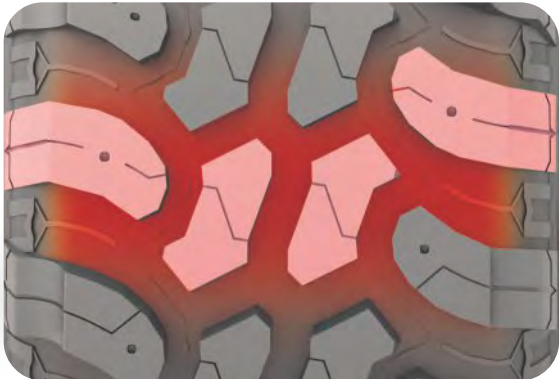

M+S

Rim Size	14 - 20
Series	50 - 85
Speed Rating	Q

MUD LEGEND SL366

Rim (inch)	Size	LR/PR	Service Index	Standard Rim					Rim (inch)	Size	LR/PR	Service Index	Standard Rim				
14"	185R14C	D/8PR	102/100Q	5.5J	/	POR	/	/	16"	205R16C	D/8PR	110/108Q	6.0J	/	POR	/	/
	195R14C	D/8PR	106/104Q	5.5J	/	POR	/	/		LT225/75R16	E/10PR	115/112Q	6.0J	/	POR	/	/
15"	205/70R15C	C/6PR	104/102Q	6.0J	/	POR	/	/	16"	LT245/75R16	E/10PR	120/116Q	7.0J	/	POR	/	/
	30×9.50R15LT	C/6PR	104Q	7.5J	/	POR	/	/		LT235/85R16	E/10PR	120/116Q	6.5J	/	POR	/	/
	31×10.50R15LT	C/6PR	109Q	8.5J	/	POR	/	/	17"	35×12.50R17LT	E/10PR	121Q	10.0J	/	POR	/	/
	32×11.50R15LT	C/6PR	113Q	9.0J	/	POR	/	/		LT265/65R17	E/10PR	120/117Q	8.0J	/	POR	/	/
	33×12.50R15LT	C/6PR	108Q	10.0J	/	POR	/	/		LT245/70R17	E/10PR	119/116Q	7.0J	/	POR	/	/
	35×12.50R15LT	C/6PR	113Q	10.0J	/	POR	/	/		LT265/70R17	E/10PR	121/118Q	8.0J	/	POR	/	/
16"	LT215/75R15	C/6PR	100/97Q	6.0J	/	POR	/	/		LT285/70R17	E/10PR	121/118Q	8.5J	/	POR	/	/
	LT225/75R15	C/6PR	102/99Q	6.0J	/	POR	/	/		LT315/70R17	E/10PR	121/118Q	9.5J	/	POR	/	/
	LT235/75R15	C/6PR	104/101Q	6.5J	/	POR	/	/	20"	33×12.50R20LT	E/10PR	114Q	10.0J	/	POR	/	/
	LT235/75R15	D/8PR	110/107Q	6.5J	/	POR	/	/		35×12.50R20LT	E/10PR	121Q	10.0J	/	POR	/	/

POR: Professional Off-Road




H188



Benefits and Features

- Valuable commercial light truck tyre for vehicles on paved roads
- 3 rib grooves provides improved handling and comfort
- Polyester tyre casing with steel belts for good durability

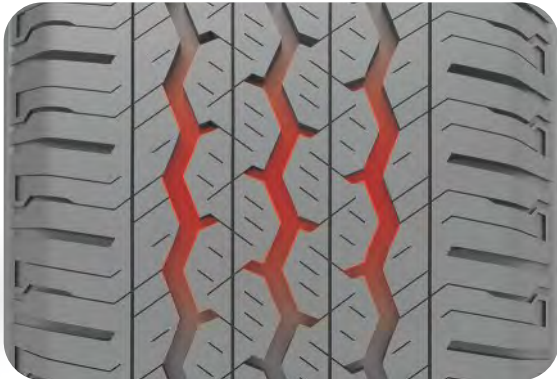

Rim Size	12 - 16
Series	60 - 75
Speed Rating	Q - H

H188

Rim (inch)	Size	LR/PR	Service Index	Standard Rim				XYdB ABC
12"	155R12C	C/6PR	83/81Q	4.5B	D	C		72/B
13"	155R13C	D/8PR	90/88S	4.5B	D	C		72/B
	165R13C	C/6PR	91/89S	4.5B	D	C		72/B
	165/70R13C	C/6PR	88/86S	5.0J	D	C		72/B
14"	185R14C	D/8PR	102/100R	5.5J	D	C		72/B
	195R14C	D/8PR	106/104Q	5.5J	D	C		72/B
	175/70R14C	C/6PR	95/93S	5.0J	D	C		72/B
15"	195R15C	D/8PR	106/104R	5.5J	C	C		72/B
	205/65R15C	C/6PR	102/100T	6.0J	C	C		72/B
	215/65R15C	C/6PR	104/102T	6.5J	C	C		72/B
	195/70R15C	D/8PR	104/102R	6.0J	C	C		72/B
	205/70R15C	D/8PR	106/104R	6.0J	C	C		72/B
	215/70R15C	D/8PR	109/107R	6.5J	C	C		72/B
	225/70R15C	D/8PR	112/110R	6.5J	C	C		72/B
16"	195/60R16C	C/6PR	99/97H	6.0J	C	C		72/B
	215/60R16C	D/8PR	108/106T	6.5J	C	C		72/B
	195/65R16C	D/8PR	104/102T	6.0J	C	C		72/B
	205/65R16C	D/8PR	107/105T	6.0J	C	C		72/B
	215/65R16C	D/8PR	109/107T	6.5J	C	C		72/B
	225/65R16C	D/8PR	112/110T	6.5J	C	C		72/B
	235/65R16C	D/8PR	115/113R	7.0J	C	C		72/B
	185/75R16C	D/8PR	104/102R	5.0J	C	C		72/B
	195/75R16C	D/8PR	107/105R	5.5J	C	C		72/B
	205/75R16C	D/8PR	110/108Q	5.5J	C	C		72/B
	215/75R16C	D/8PR	113/111Q	6.0J	C	C		72/B
	225/75R16C	E/10PR	118/116R	6.0J	C	C		72/B



ALL Season Elite Z-401



Benefits and Features

- Divergent V-Groove provides excellent snow and water drainage performance
- ZC-Rubber's special all season tread compound ensures the longer mileage
- logical kerfs design delivers outstanding traction performance on both snow and wet surface




M+S



Rim Size	13 - 20
Series	35 - 80
Speed Rating	T - W

ALL Season Elite Z-401

Rim (inch)	Size	Service Index	Standard Rim				Rim (inch)	Size	Service Index	Standard Rim			
13"	155/65R13	73T	4.5B	D	C	71/B	17"	205/45R17 XL	88V	7.0J	D	C	72/B
	175/65R13	80T	5.0B	D	C	71/B		215/45R17 XL	91W	7.0J	C	C	72/B
	155/70R13	75T	4.5B	D	C	71/B		225/45R17 XL	94W	7.5J	C	C	72/B
	165/70R13	79T	5.0B	D	C	71/B		235/45R17 XL	97W	8.0J	C	C	72/B
	155/80R13	79T	4.5B	D	C	71/B		245/45R17 XL	99W	8.0J	C	C	72/B
14"	185/55R14	80H	6.0J	D	C	71/B		205/50R17 XL	93V	6.5J	C	C	72/B
	165/60R14 XL	79H	5.0J	D	C	71/B		215/50R17 XL	95W	7.0J	C	C	72/B
	185/60R14	82H	5.5J	D	C	71/B		225/50R17 XL	98W	7.0J	C	C	72/B
	155/65R14	75T	4.5J	D	C	71/B		205/55R17 XL	95V	6.5J	C	C	72/B
	165/65R14	79T	5.0J	D	C	71/B		215/55R17 XL	98V	7.0J	C	C	72/B
	175/65R14	82T	5.0J	D	C	71/B		225/55R17 XL	101W	7.0J	C	C	72/B
	185/65R14	86H	5.5J	D	C	71/B		235/55R17 XL	103W	7.5J	C	C	72/B
	165/70R14	81T	5.0J	D	C	71/B		215/60R17	96H	6.5J	C	C	72/B
	175/70R14 XL	88T	5.0J	C	C	71/B		225/60R17	99V	6.5J	C	C	72/B
	185/70R14	88T	5.5J	D	C	71/B		235/60R17	102V	7.0J	C	C	72/B
15"	195/50R15	82V	6.0J	D	C	72/B		215/65R17	99V	6.5J	C	C	72/B
	185/55R15	82H	6.0J	D	C	71/B		225/65R17 XL	106H	6.5J	C	C	72/B
	195/55R15 XL	89V	6.0J	D	C	72/B		235/65R17XL	108V	7.0J	C	C	72/B
	155/60R15	74T	4.5J	D	C	71/B	18"	225/40R18 XL	92W	8.0J	D	C	72/B
	185/60R15 XL	88H	5.5J	C	C	71/B		235/40R18 XL	95W	8.5J	C	C	72/B
	195/60R15	88V	6.0J	D	C	72/B		245/40R18 XL	97W	8.5J	C	C	72/B
	165/65R15	81T	5.0J	D	C	71/B		215/45R18 XL	93W	7.0J	C	C	72/B
	175/65R15	84H	5.0J	D	C	71/B		225/45R18 XL	95W	7.5J	C	C	72/B
	185/65R15 XL	92H	5.5J	C	C	71/B		235/45R18 XL	98W	8.0J	C	C	72/B
	195/65R15	91V	6.0J	C	C	72/B		245/45R18 XL	100W	8.0J	C	C	72/B
	195/65R15 XL	95H	6.0J	C	C	72/B		225/50R18	95W	7.0J	C	C	72/B
	205/65R15	94H	6.0J	C	C	72/B		235/50R18 XL	101W	7.5J	C	C	72/B
	215/65R15	96H	6.5J	D	C	72/B		215/55R18 XL	99V	7.0J	D	C	72/B
16"	195/45R16 XL	84V	6.5J	D	C	72/B		225/55R18	98V	7.0J	C	C	72/B
	205/45R16 XL	87W	7.0J	D	C	72/B		235/55R18	100V	7.5J	C	C	72/B
	215/45R16 XL	90V	7.0J	D	C	72/B		235/60R18 XL	107V	7.0J	C	C	72/B
	185/50R16	81H	6.0J	D	C	71/B	19"	225/35R19 XL	88W	8.0J	D	C	72/B
	195/50R16XL	88V	6.0J	D	C	72/B		235/35R19 XL	91W	8.5J	D	C	72/B
	185/55R16 XI	87H	6.0J	C	C	71/B		255/35R19 XL	96W	9.0J	C	C	73/B
	195/55R16 XL	91V	6.0J	C	C	72/B		225/40R19 XL	93W	8.0J	D	C	72/B
	205/55R16	91V	6.5J	C	C	72/B		235/40R19 XL	96W	8.5J	C	C	72/B
	205/55R16 XL	94V	6.5J	C	C	72/B		245/40R19 XL	98W	8.5J	C	C	72/B
	215/55R16 XL	97V	7.0J	C	C	72/B		225/45R19XL	96W	7.5J	C	C	72/B
	225/55R16 XL	99V	7.0J	C	C	72/B		235/45R19 XL	99W	8.0J	C	C	72/B
	195/60R16	89V	6.0J	D	C	72/B		245/45R19 XL	102W	8.0J	C	C	72/B
	205/60R16 XL	96V	6.0J	C	C	72/B		235/50R19	99V	7.5J	C	C	72/B
17"	215/60R16 XL	99V	6.5J	C	C	72/B		255/50R19 XL	107W	8.0J	B	C	73/B
	235/60R16	100V	7.0J	C	C	72/B		225/55R19	99V	7.0J	C	C	72/B
	215/65R16	98V	6.5J	C	C	72/B		235/55R19 XL	105W	7.5J	C	C	72/B
	215/70R16	100H	6.5J	C	C	72/B		255/55R19 XL	111W	8.0J	B	C	73/B
	205/40R17XL	84W	7.5J	D	C	72/B	20"	255/45R20 XL	105W	8.5J	B	C	73/B
	215/40R17 XL	87W	7.5J	D	C	72/B		265/45R20 XL	108W	9.0J	B	C	73/B

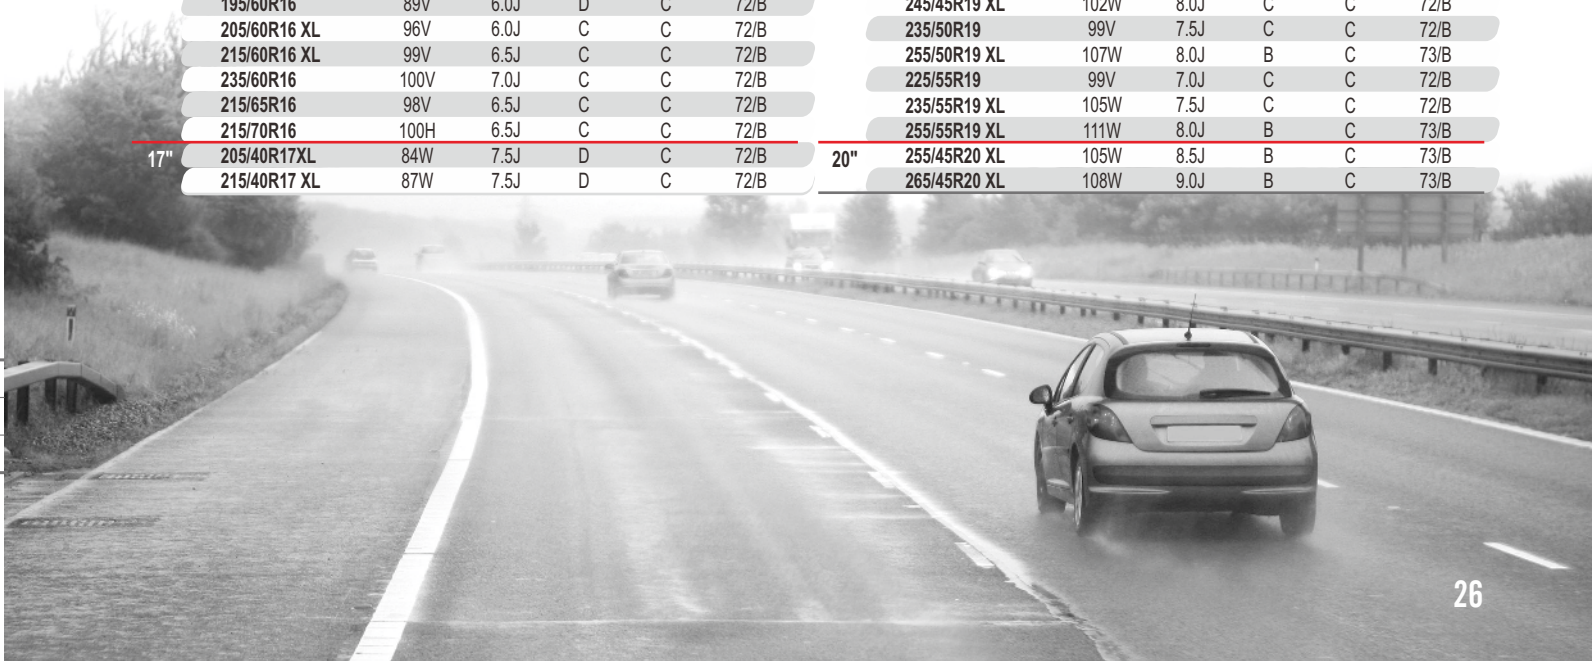


ALL Season Master SW613



Benefits and Features

- Premium commercial tyre for all season usage
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life

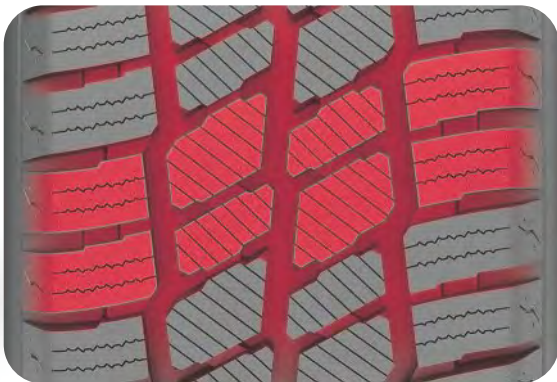

Rim Size	15 - 16
Series	60 - 75
Speed Rating	Q - T

ALL Season Master SW613

Rim (inch)	Size	Service Index	Standard Rim					Rim (inch)	Size	Service Index	Standard Rim				
15"	195/70R15C	104/102R	6.0J	D	C	72/B		16"	215/65R16C	109/107R	6.5J	D	C	72/B	
	205/70R15C	106/104R	6.0J	D	C	72/B			225/65R16C	112/110R	6.5J	D	C	72/B	
	215/70R15C	109/107R	6.5J	D	C	72/B			235/65R16C	115/113R	7.0J	D	C	72/B	
	225/70R15C	112/110R	6.5J	D	C	72/B			185/75R16C	104/102Q	5.0J	E	C	72/B	
16"	195/60R16C	99/97T	6.0J	E	C	72/B			195/75R16C	107/105R	5.5J	D	C	72/B	
	195/65R16C	104/102T	6.0J	D	C	72/B			205/75R16C	110/108Q	5.5J	D	C	72/B	
	205/65R16C	107/105T	6.0J	D	C	72/B			215/75R16C	113/111Q	6.0J	D	C	72/B	




Zuper Snow Z-507



Benefits and Features

- Asymmetric pattern design provides superior handing on snow surface
- Optimised lateral groove angle offers strong snow performance
- Special zigzag traction sipes improves traction and braking performance on snow roads

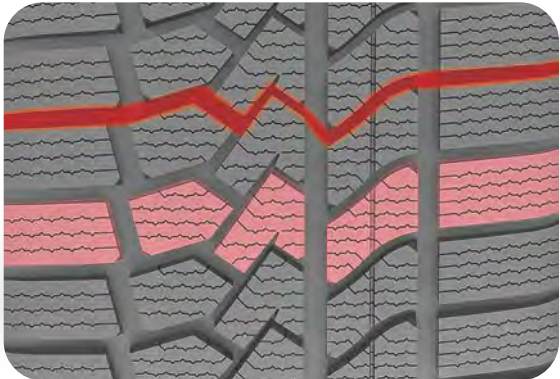

M+S



Rim Size	16 - 20
Series	35 - 70
Speed Rating	H - V

Zuper Snow Z-507

Rim (inch)	Size	Service Index	Standard Rim				
16"	195/45R16 XL	84V	6.5J	D	C	72/B	
	205/45R16 XL	87V	7.0J	C	C	72/B	
	215/45R16	90V	7.0J	C	C	72/B	
	205/50R16 XL	91V	6.5J	C	C	72/B	
	185/55R16	83H	6.0J	C	C	72/B	
	205/55R16	91V	6.5J	C	C	72/B	
	215/55R16 XL	97H	7.0J	C	C	72/B	
	225/55R16 XL	99V	7.0J	C	C	72/B	
	205/60R16	92H	6.0J	C	C	72/B	
	215/60R16 XL	99H	6.5J	C	C	72/B	
	225/60R16	98H	6.5J	C	C	72/B	
	235/60R16	100H	7.0J	C	C	72/B	
	215/65R16	98H	6.5J	C	C	72/B	
	215/70R16	100H	6.5J	C	C	72/B	
	235/70R16	106H	7.0J	C	C	72/B	
	245/70R16	107H	7.0J	C	C	72/B	
	265/70R16	112H	8.0J	B	C	72/B	
17"	215/45R17 XL	91V	7.0J	C	C	72/B	
	225/45R17 XL	94V	7.5J	C	C	72/B	
	235/45R17 XL	97V	8.0J	C	C	72/B	
	245/45R17 XL	99V	8.0J	C	C	72/B	
	205/50R17 XL	93V	6.5J	C	C	72/B	
	215/50R17 XL	95V	7.0J	C	C	72/B	
	225/50R17 XL	98V	7.0J	C	C	72/B	
	205/55R17 XL	95V	6.5J	C	C	72/B	
	215/55R17 XL	98V	7.0J	C	C	72/B	
	225/55R17 XL	101V	7.0J	C	C	72/B	
	235/55R17 XL	103V	7.5J	C	C	72/B	
	215/60R17 XL	100V	6.5J	C	C	72/B	
	225/60R17 XL	103V	6.5J	C	C	72/B	
	235/60R17	102V	7.0J	C	C	72/B	
	225/65R17	102H	6.5J	C	C	72/B	
	245/65R17	107H	7.0J	C	C	72/B	
	265/65R17	112H	8.0J	B	C	73/B	
18"	225/40R18 XL	92V	8.0J	C	C	72/B	
	235/40R18 XL	95V	8.5J	C	C	72/B	
	245/40R18 XL	97V	8.5J	C	C	72/B	
18"	255/40R18 XL	99V	9.0J	C	C	73/B	
	215/45R18 XL	93V	7.0J	C	C	72/B	
	225/45R18 XL	95V	7.5J	C	C	72/B	
	235/45R18 XL	98V	8.0J	C	C	72/B	
	245/45R18 XL	100V	8.0J	C	C	72/B	
	255/45R18 XL	103V	8.5J	C	C	73/B	
	215/50R18	92V	7.0J	C	C	72/B	
	225/50R18 XL	99V	7.0J	C	C	72/B	
	235/50R18 XL	101V	7.5J	C	C	72/B	
	245/50R18 XL	104V	7.5J	C	C	72/B	
	215/55R18 XL	99V	7.0J	C	C	72/B	
	225/55R18 XL	102V	7.0J	C	C	72/B	
	235/55R18 XL	104V	7.5J	B	C	72/B	
	255/55R18 XL	109V	8.0J	B	C	73/B	
	225/60R18 XL	104V	6.5J	C	C	72/B	
	235/60R18 XL	107V	7.0J	B	C	72/B	
19"	225/35R19 XL	88V	8.0J	C	C	72/B	
	235/35R19 XL	91V	8.5J	C	C	72/B	
	255/35R19 XL	96V	9.0J	C	C	73/B	
	225/40R19 XL	93V	8.0J	C	C	72/B	
	235/40R19 XL	96V	8.5J	C	C	72/B	
	245/40R19 XL	98V	8.5J	C	C	72/B	
	255/40R19 XL	100V	9.0J	C	C	73/B	
	275/40R19 XL	105V	9.5J	C	C	73/B	
	225/45R19 XL	96V	7.5J	C	C	72/B	
	235/45R19 XL	99V	8.0J	C	C	72/B	
	245/45R19 XL	102V	8.0J	C	C	72/B	
	255/45R19 XL	104V	8.5J	B	C	72/B	
	235/50R19 XL	103V	7.5J	C	C	72/B	
	245/50R19 XL	105H	7.5J	B	C	72/B	
	255/50R19 XL	107V	8.0J	B	C	73/B	
	225/55R19	99V	7.0J	C	C	72/B	
	235/55R19 XL	105V	7.5J	C	C	72/B	
20"	255/55R19 XL	111H	8.0J	B	C	72/B	
	275/40R20 XL	106V	9.5J	B	C	73/B	
	255/45R20 XL	105V	8.5J	B	C	72/B	
20"	275/45R20 XL	110V	9.0J	B	C	73/B	




SW608



Benefits and Features

- V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly
- Optimized direction of sipes maximize the tyre's contact with the road surface and delivers outstanding traction and control in all winter driving conditions
- Special winter tread compound offers performance driving

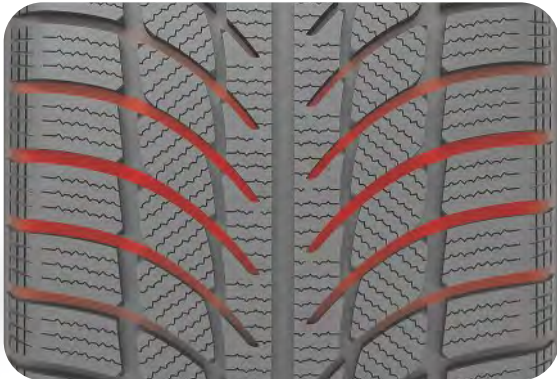

M+S



Rim Size	13 - 20
Series	30 - 80
Speed Rating	Q - V

SW608


Rim (inch)	Size	LR/PR	Service Index	Standard Rim					Rim (inch)	Size	LR/PR	Service Index	Standard Rim				
14"	185R14C	D/8PR	102/100Q	5.5J	D	C		73/B	17"	205/40R17 XL	-	84V	7.5J	D	C		72/B
15"	195/70R15C	D/8PR	104/102R	6.0J	D	C		73/B		215/40R17 XL	-	87V	7.5J	D	C		72/B
13"	155/70R13	-	75T	4.5B	D	C		71/B		245/40R17 XL	-	95V	8.5J	C	C		72/B
	165/70R13	-	79T	5.0B	D	C		71/B		205/45R17 XL	-	88V	7.0J	D	C		72/B
	175/70R13	-	82T	5.0B	D	C		71/B		215/45R17 XL	-	91V	7.0J	D	C		72/B
	155/80R13	-	79T	4.5B	E	C		71/B	225/45R17 XL	-	94V	7.5J	C	C		72/B	
14"	185/60R14	-	82H	5.5J	D	C		71/B	235/45R17 XL	-	97H	8.0J	C	C		72/B	
	195/60R14	-	86H	6.0J	C	C		72/B	245/45R17 XL	-	99V	8.0J	D	C		72/B	
	155/65R14	-	75T	4.5B	D	C		71/B	205/50R17 XL	-	93H	6.5J	C	C		72/B	
	175/65R14	-	82H	5.0J	D	C		71/B	215/50R17 XL	-	95V	7.0J	C	C		72/B	
	185/65R14	-	86H	5.5J	C	C		71/B	225/50R17 XL	-	98H	7.0J	C	C		72/B	
	165/70R14	-	81T	5.0J	D	C		71/B	215/55R17 XL	-	98V	7.0J	C	C		72/B	
	175/70R14	-	84T	5.0J	D	C		71/B	225/55R17 XL	-	101V	7.0J	C	C		72/B	
	185/70R14	-	88T	5.5J	D	C		71/B	235/55R17 XL	-	103V	7.5J	C	C		72/B	
	195/70R14	-	91T	6.0J	C	C		72/B	215/60R17	-	96H	6.5J	C	C		72/B	
	15"	185/55R15 XL	-	86H/V	6.0J	D	C		71/B	225/60R17	-	99H	6.5J	C	C		72/B
195/55R15 XL		-	89H	6.0J	C	C		72/B	235/65R17 XL	-	108H	7.0J	C	C		72/B	
185/60R15 XL		-	88H	5.5J	D	C		71/B	18"	225/40R18 XL	-	92V	8.0J	D	C		72/B
195/60R15		-	88H	6.0J	D	C		72/B		235/40R18 XL	-	95V	8.5J	D	C		72/B
175/65R15		-	84T	5.0J	D	C		71/B		245/40R18 XL	-	97V	8.5J	C	C		72/B
185/65R15		-	88H	5.5J	C	C		71/B		225/45R18 XL	-	95V	7.5J	D	C		72/B
195/65R15		-	91H	6.0J	D	C		72/B		235/45R18 XL	-	98V	8.0J	C	C		72/B
205/65R15		-	94H	6.0J	C	C		72/B	245/45R18 XL	-	100V	8.0J	D	C		72/B	
215/70R15		-	98H	6.5J	D	C		72/B	225/50R18 XL	-	99V	7.0J	C	C		72/B	
16"		195/50R16 XL	-	88H	6.0J	C	C		72/B	235/50R18 XL	-	101V	7.5J	C	C		72/B
	225/50R16 XL	-	96V	7.0J	C	C		72/B	245/50R18 XL	-	104V	7.5J	C	C		72/B	
	195/55R16	-	87H	6.0J	C	C		72/B	225/60R18 XL	-	104V	6.5J	C	C		72/B	
	205/55R16	-	91H	6.5J	C	C		72/B	19"	225/35R19 XL	-	88V	8.0J	D	C		72/B
	215/55R16 XL	-	97H	7.0J	C	C		72/B		235/45R19 XL	-	99V	8.0J	C	C		72/B
	225/55R16 XL	-	99H	7.0J	C	C		72/B		245/45R19 XL	-	102V	8.0J	C	C		72/B
	205/60R16	-	92H	6.0J	C	C		72/B	20"	245/30R20 XL	-	90V	8.5J	D	C		72/B
	215/60R16 XL	-	99H	6.5J	C	C		72/B									
	225/60R16	-	98H	6.5J	C	C		72/B									
	215/65R16	-	98H	6.5J	C	C		72/B									

SW612



Benefits and Features

- All-round winter performance for vans and other commercial vehicles
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life

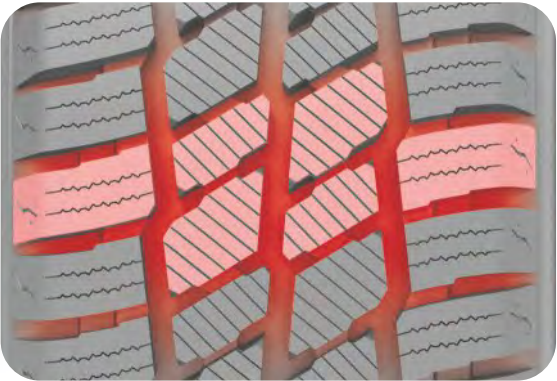

Rim Size	12 - 16
Series	60 - 75
Speed Rating	N - T

SW612

Rim (inch)	Size	LR/PR	Service Index	Standard Rim				
12"	155R12C	D/8PR	88/86Q	4.5B	E	C	72/B	
13"	155R13C	C/6PR	85/83Q	4.5J	D	C	72/B	
	165R13C	C/6PR	91/89Q	4.5B	E	C	72/B	
	175R13C	D/8PR	97/95Q	5.0B	D	C	72/B	
14"	185R14C	D/8PR	102/100R	5.5J	D	C	72/B	
	175/70R14C	C/6PR	95/93Q	5.0J	E	C	72/B	
15"	195R15C	D/8PR	106/104R	5.5J	D	C	72/B	
	205/65R15C	C/6PR	102/100T	6.0J	D	C	72/B	
	195/70R15C	D/8PR	104/102R	6.0J	D	C	72/B	
	205/70R15C	D/8PR	106/104R	6.0J	D	C	72/B	
	215/70R15C	D/8PR	109/107R	6.5J	D	C	72/B	
	225/70R15C	D/8PR	112/110R	6.5J	D	C	72/B	
16"	6.50R16	E/10PR	108/107N	5.5F	D	C	72/B	

Rim (inch)	Size	LR/PR	Service Index	Standard Rim				
16"	7.00R16	F/12PR	117/116N	5.5F	D	C	72/B	
	195/60R16C	C/6PR	99/97T	6.0J	E	C	72/B	
	195/65R16C	D/8PR	104/102T	6.0J	D	C	72/B	
	205/65R16C	D/8PR	107/105T	6.0J	D	C	72/B	
	215/65R16C	D/8PR	109/107R	6.5J	D	C	72/B	
	225/65R16C	D/8PR	112/110R	6.5J	D	C	72/B	
	235/65R16C	D/8PR	115/113R	7.0J	D	C	72/B	
	185/75R16C	D/8PR	104/102Q	5.0J	E	C	72/B	
	195/75R16C	D/8PR	107/105R	5.5J	D	C	72/B	
	205/75R16C	D/8PR	110/108Q	5.5J	D	C	72/B	
	215/75R16C	D/8PR	113/111Q	6.0J	D	C	72/B	
	225/75R16C	E/10PR	118/116Q	6.0J	D	C	72/B	




IceMaster Spike Z-506



Benefits and Features

- Studable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

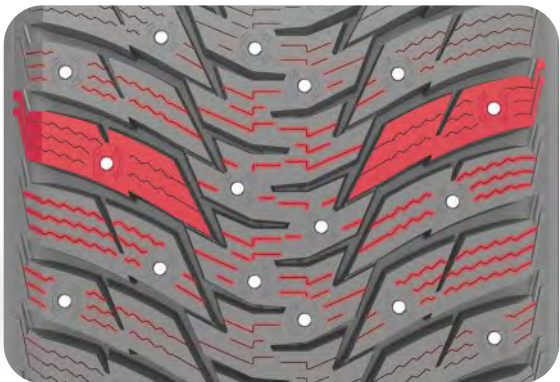

M+S




Rim Size	14 - 20
Series	35 - 70
Speed Rating	T - H

IceMaster Spike Z-506


Rim (inch)	Size	Service Index	Standard Rim					Rim (inch)	Size	Service Index	Standard Rim				
14"	175/65R14 XL	86T	5.0J	/	/	/	/	17"	215/65R17 XL	103T	6.5J	/	/	/	/
	185/60R14	82T	5.5J	/	/	/	/		225/65R17	102T	6.5J	/	/	/	/
	185/65R14	86T	5.5J	/	/	/	/		235/65R17	104T	7.0J	/	/	/	/
	195/70R14 XL	91T	6.0J	/	/	/	/		245/65R17 XL	111T	7.0J	/	/	/	/
15"	195/60R15	88T	6.0J	/	/	/	/	18"	265/70R17	115T	8.0J	/	/	/	/
	185/65R15 XL	92T	5.5J	/	/	/	/		225/40R18 XL	92T	8.0J	/	/	/	/
	195/65R15 XL	95T	6.0J	/	/	/	/		235/40R18 XL	95T	8.5J	/	/	/	/
	205/65R15	94T	6.0J	/	/	/	/		245/40R18 XL	97T	8.5J	/	/	/	/
16"	205/50R16	87T	6.5J	/	/	/	/	19"	225/45R18 XL	95H	7.5J	/	/	/	/
	195/55R16	87T	6.0J	/	/	/	/		235/45R18 XL	98T	8.0J	/	/	/	/
	205/55R16 XL	94T	6.5J	/	/	/	/		245/45R18 XL	100T	8.0J	/	/	/	/
	215/55R16 XL	97T	7.0J	/	/	/	/		235/50R18 XL	101T	7.5J	/	/	/	/
	225/55R16	95T	7.0J	/	/	/	/		215/55R18 XL	99T	7.0J	/	/	/	/
	205/60R16 XL	96T	6.0J	/	/	/	/		225/55R18 XL	102T	7.0J	/	/	/	/
	215/60R16	95T	6.5J	/	/	/	/		235/55R18 XL	104T	7.5J	/	/	/	/
	205/65R16	95T	6.0J	/	/	/	/		255/55R18 XL	109T	8.0J	/	/	/	/
	215/65R16	98T	6.5J	/	/	/	/		225/60R18 XL	104T	6.5J	/	/	/	/
	215/70R16	100T	6.5J	/	/	/	/		235/60R18 XL	107T	7.0J	/	/	/	/
	235/70R16	106T	7.0J	/	/	/	/		255/35R19 XL	96T	9.0J	/	/	/	/
	215/45R17 XL	91T	7.0J	/	/	/	/		275/35R19 XL	100T	9.5J	/	/	/	/
17"	225/45R17 XL	94H	7.5J	/	/	/	/	20"	225/40R19 XL	93H	8.0J	/	/	/	/
	235/45R17 XL	97T	8.0J	/	/	/	/		245/40R19 XL	98T	8.5J	/	/	/	/
	245/45R17 XL	99T	8.0J	/	/	/	/		245/45R19 XL	102T	8.0J	/	/	/	/
	205/50R17 XL	93T	6.5J	/	/	/	/		255/45R19 XL	104T	8.5J	/	/	/	/
	215/50R17 XL	95T	7.0J	/	/	/	/		235/50R19 XL	103T	7.5J	/	/	/	/
	225/50R17 XL	98H	7.0J	/	/	/	/		255/50R19 XL	107T	8.0J	/	/	/	/
	215/55R17 XL	98T	7.0J	/	/	/	/		235/55R19	105T	7.5J	/	/	/	/
	225/55R17 XL	101T	7.0J	/	/	/	/		315/35R20 XL	110T	11.0J	/	/	/	/
18"	235/55R17	99T	7.5J	/	/	/	/	20"	275/40R20 XL	106T	9.5J	/	/	/	/
	215/60R17	96T	6.5J	/	/	/	/		275/55R20 XL	117T	8.5J	/	/	/	/
	225/60R17 XL	103T	6.5J	/	/	/	/		275/60R20	115T	8.0J	/	/	/	/



TYRE SIZE KNOWLEDGE

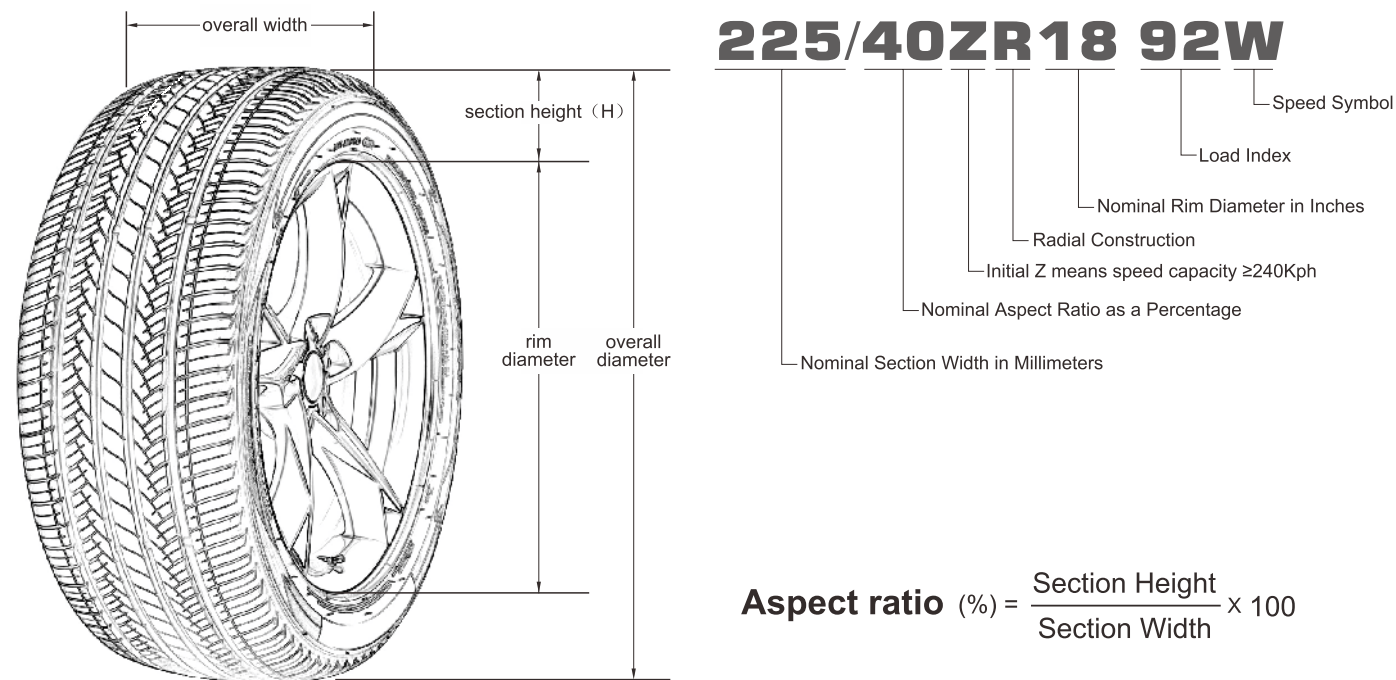

SIDEWALL INSTRUCTION

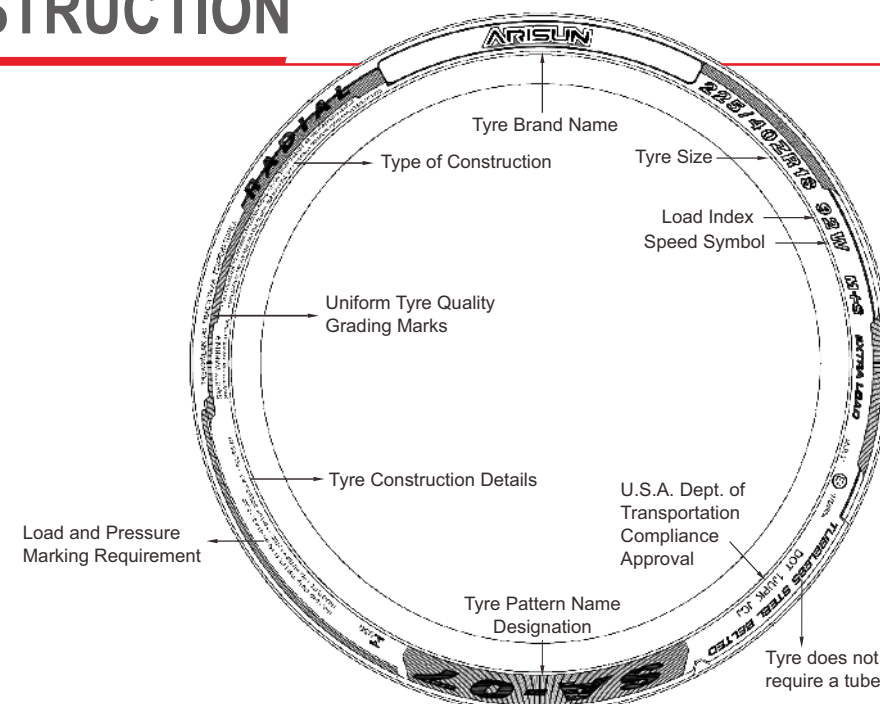

OTHER MARKINGS

- P** as part of the tyre size designation (e.g., P205/65R15) used to indicate tyres intended for services on passenger cars.
- LT** as part of the size designation (e.g., LT235/75R15) used to indicate the tyres are intended for light truck vehicles.
- M&S** letters used to indicate a tyre suitable for Mud and Snow and/or All Season usage.
- XL** as part of the size designation (e.g., P235/75R16 XL) used to indicate the tyre can carry more loads as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED or RF).
- ZR** as part of the tyre size designation (e.g. 225/45ZR17 XL) used to indicate the tyre has a maximum speed over 240 kilometer per hour.

TYRE UPGRADE

"Tyre Upgrade" means: increase of rim diameter without changing of tyre overall diameter, the trend in development of low aspect ratio is called upgrade.

INCREASE OF SPORTY PERFORMANCE

The tyre response will be more sensitive when you turn the steering wheel that the flex of tyre will be reduced, and the performance of steering and handling stability will be better, especially under medium and high speed driving.


ENHANCEMENT OF BRAKING ABILITY

The braking stability will be improved due to the decrease of tyre flex when you brake.

Please refer to the clarifications set forth below to upgrade the tyre:

- Without any particular reason, please do not change the overall diameter of tyre easily. The alternation of tyre overall diameter will cause misreading of speedometer or mutual interference between tyre and other parts of vehicle.
- Please determine the width of tyre in accordance with the specific width of vehicle. If the width of the entire tyre is increased overly, it will cause mutual interference between tyre and other parts of vehicle, even heading out of the tyre from bodywork which will initiate danger.
- Notice the load index of vehicle when you upgrade the tyre. There is rule to the weight which the tyre can bear (load index) for each size. Please refer to the load index when you chose the proper size.

Under the condition of keeping general the same of tyre overall diameter, the tyre can be upgraded to:

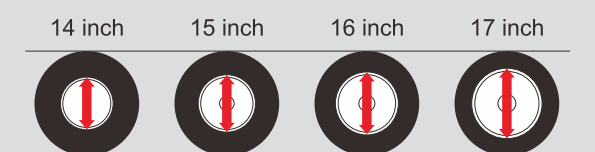

TYRE ROTATION AND INFLATION


TYRE ROTATION

The purpose for rotating tyres is to achieve a more uniform wear for all tyres on a vehicle. Before rotating tyres, determine the cause of any unusual wear and correct any misalignment, imbalance, or other mechanical problems.

Otherwise it will cause: **1.** Ride disturbing; **2.** More noise; **3.** Poor ride comfort; **4.** Shorter of life span.

Note: it is suggested that tyres should be transposed as soon as the phenomena above mentioned are detected (especially the two front wheels).

The tyre transposition patterns are acceptable below. Please refer to your vehicle owner's manual regarding tyre transposition advice.

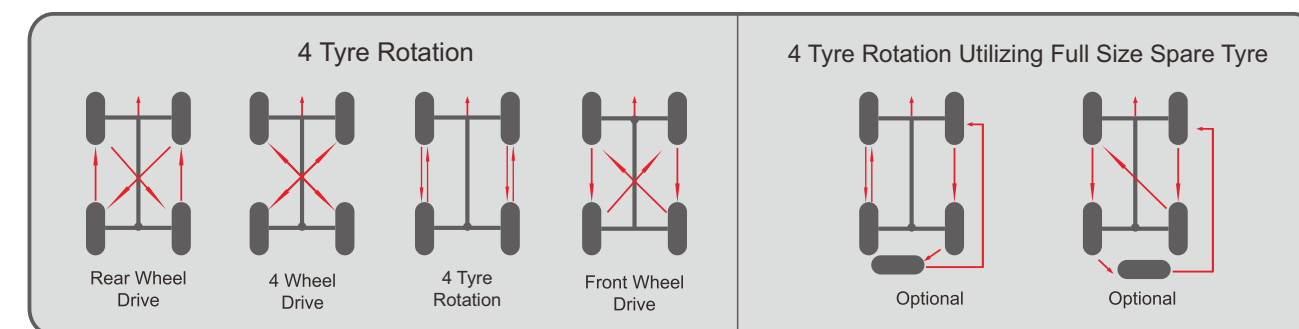

TYRE INFLATION

One of the most important aspects of tyre maintenance is proper inflation.

Sufficient inflation is needed to carry the load and avoid damage. Driving with improper inflation (particularly grossly under inflated or over inflated tyres) is dangerous and can cause critical damage or sudden failure of the tyre(s). Proper inflation should be maintained and checked on at least weekly bases and before long distance drives.

Proper inflation should be maintained and checked at least once a week and before a long distance drive.

It is also advisable to take into account axle load and driving conditions when setting inflation pressure. Compensation for heavier loads can be made by increasing inflation pressure, but do not exceed maximum inflation for the tyre or maximum axle load.

In the space of just one month, a tyre can lose 10 pounds of air pressure.

It is important to check your air pressure regularly, to make sure your tyres are neither under nor over inflated.

Under-inflation

Is the worst enemy your tyre can have. It causes increased treadwear on the outside edges (or shoulders) of the tyre. It

also generates excessive heat, which reduces tyre durability. Finally it reduces your fuel economy by increasing rolling resistance-soft tyres make your vehicle work harder.

Over-inflation

Is also detrimental to the tyre. Too much air pressure causes the center of the tread to bear the majority of the truck's weight, which leads to faster deterioration and uneven wear. Any kind of uneven wear will shorten the lifespan of your tyres.


MOUNTING PROCEDURE

There is extreme danger in attempting to install a tyre of one rim diameter on a rim of a different rim diameter.

Always replace a tyre on a rim with another tyre of exactly the same diameter tyre designation and suffix letters.

For example, a 16" tyre goes with a 16" rim. Never mount a 16" size diameter tyre on a 16.5" rim. While it is possible to pass a 16" diameter tyre over the lip or flange of a 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tyre bead by inflating, the tyre bead may break with explosive force and could cause serious bodily injury or death.

Rims of different diameters and tapers cannot be interchanged. The top right diagrams illustrate the difference between rims of two different tapers and diameters.

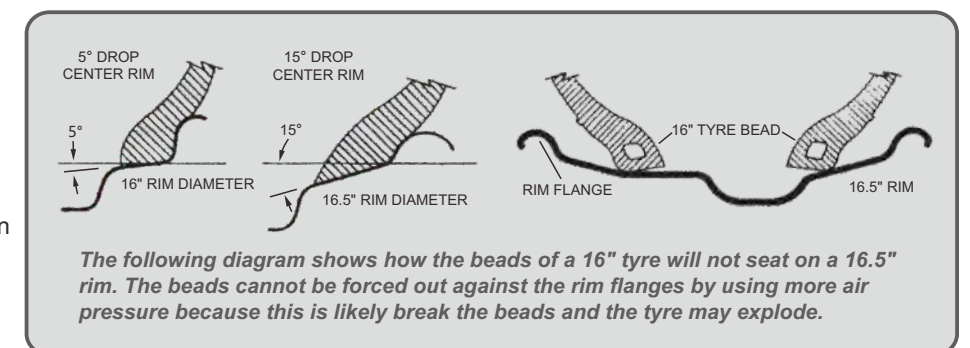

FOR YOUR SAFETY AND COMFORT

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use.

Tyre failure may create risk of property damage or personal injury. To reduce the risk of tyre failure and for your safety and comfort, we strongly recommend the following:

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.

- Never inflate beyond 275 kPa (2.75bar, 40psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or construction on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on highway and/or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other outer objects stuck in the tyre treads may damage the tyre. Remove outer objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, curbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, ZC rubber recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyre should not be driven over 80km/h for the first 100km.
- When driving on winter roads, sudden starts and quick stops should be avoided and a safe car-to-car driving distance should be maintained.
- When using tyre chains be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

Never use a tyre under the following conditions and replace tyres immediately:

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with controlled environment.

To preserve traffic safety, ZC rubber recommends driving substantially slower under adverse weather or road conditions.

ROUTINE MAINTENANCE

- Each month the tyre pressure should be checked one time at least when the tyre is cool, too much or less of the pressure will cause damage to tyre.
- Please take a 15-minutes break after driving on expressway for two hours.
- Please ensure that there are no nails, metal pieces, glass or other foreign materials.
- Please ensure that there is no damage such as separation, distortion and distinct rusting which will cause air leakage.
- Please transpose the tyres regularly (approximately 5000 km) in accordance with abrasion conditions for the sake of expanding its life span and preventing eccentric wear.
- No tyre brightener.

THE INVENTORY OF STEEL-CORD RADIAL TYRE

The tyre should be placed in dry interior.

Note: In order to ensure the driving safety, we suggest that please decrease the speed while driving under atrocious weather and poor terrain condition.

SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed Rating	L	N	P	Q	R	S	T	U	H	V	W	Y	ZR
Max. Kph. (Kilometer/hour)	120	140	150	160	170	180	190	200	210	240	270	300	≥240


LOAD INDEX

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
50	190	420	70	335	740	90	600	1320	110	1060	2340	130	1900	4180
51	195	430	71	345	760	91	615	1360	111	1090	2400	131	1950	4300
52	200	440	72	355	785	92	630	1390	112	1120	2470	132	2000	4400
53	206	455	73	365	805	93	650	1430	113	1150	2540	133	2060	4540
54	212	465	74	375	825	94	670	1480	114	1180	2600	134	2120	4680
55	218	480	75	387	855	95	690	1520	115	1215	2680	135	2180	4800
56	224	495	76	400	880	96	710	1570	116	1250	2760	136	2240	4940
57	230	505	77	412	910	97	730	1610	117	1285	2830	137	2300	5080
58	236	520	78	425	935	98	750	1650	118	1320	2910	138	2360	5200
59	243	535	79	437	965	99	775	1710	119	1360	3000	139	2430	5360
60	250	550	80	450	990	100	800	1760	120	1400	3080	140	2500	5520
61	257	565	81	462	1020	101	825	1820	121	1450	3200	141	2575	5680
62	265	585	82	475	1050	102	850	1870	122	1500	3300	142	2650	5840
63	272	600	83	487	1070	103	875	1930	123	1550	3420	143	2725	6000
64	280	615	84	500	1100	104	900	1980	124	1600	3520	144	2800	6150
65	290	640	85	515	1140	105	925	2040	125	1650	3640	145	2900	6400
66	300	660	86	530	1170	106	950	2090	126	1700	3740	146	3000	6600
67	307	675	87	545	1200	107	975	2150	127	1750	3860	147	3075	6800
68	315	695	88	560	1230	108	1000	2200	128	1800	3960	148	3150	6950
69	325	715	89	580	1280	109	1030	2270	129	1850	4080	149	3250	7150

INTRODUCING THE NEW EU TYRE LABEL

Lowering car emissions with EU tyre labels

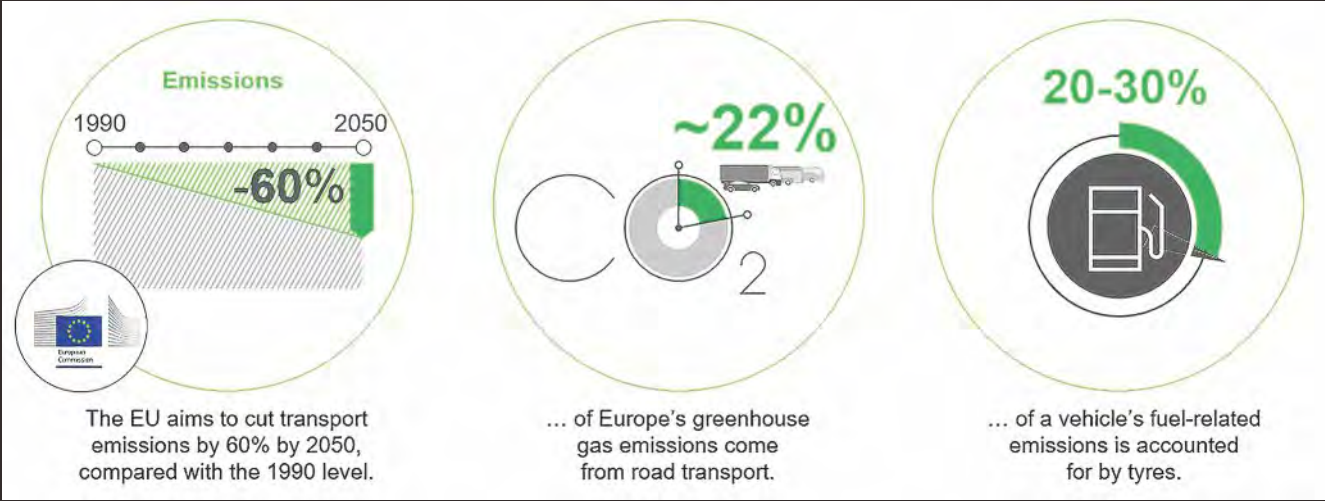


The EU has committed to cutting its greenhouse gas emissions to reach climate neutrality by 2050. Reducing CO₂ emissions from road transport plays a major part in fulfilling these goals.

Choosing more fuel-efficient tyres can contribute to reducing transport emissions. In order to help consumers make informed decisions, the EU is introducing a new labelling scheme for tyres which will come into force on May 1, 2021.

The EU tyre label will allow EU consumers to choose more fuel-efficient tyres, which can lead to great savings for both end users and commercial users in terms of both costs and emissions. Road safety is improved through better wet grip while information on noise levels help reduce traffic-related noise pollution.

The New EU Tyre Label

- > Under the **new regulation**, bus and truck tyres will also be covered (**tyre class C1, C2, C3**).
- > Additional information (**tyre type identifier** = art. no.).
- > In addition to the standard label, there are also options for including icons relating to **severe snow conditions** (3PMSF) and/or grip in icy conditions (for C1 tyres only).
- > **Noise classes:** ABC replace sound waves.
- > **Reclassification for lower label classes:** D is the new E; Class D no longer empty (for C1 & C2 tyres only); F and G merge to form E.
- > **QR code** for each tyre type identifier with link to EU product database (EPREL).

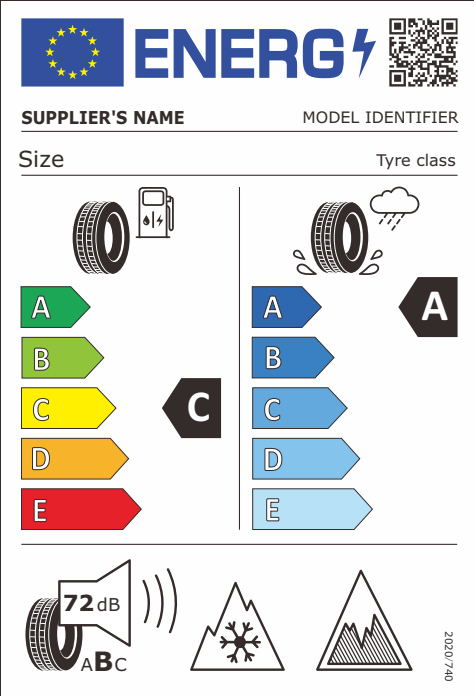

ARISUN



www.zc-rubber.com



www.facebook.com/zcrubber



www.twitter.com/zc_rubber



www.linkedin.com/company/zcrubber